

Description

NOTE: Throughout this document the Rhino SD/XD Type-G/D Pneumatic Control Modules for Glass Applications are referred to as the Control Module.

See Figure 1. Each Control Module (1) provides the pneumatic operating functions for Rhino SD/XD bulk unloaders (2). It mounts to the side of small- and large-frame Rhino SD/XD bulk unloaders.

The Control Modules can be configured for use on standalone or changeover Rhino SD/XD bulk unloaders. The changeover configuration allows the operator to change the empty container of one Rhino SD/XD bulk unloader while the other one is operating.

Four Control Modules are available:

- 24 Vdc MS Connector
- 120 Vac MS Connector
- 24 Vdc Micro Connector
- Manual Operation (Without Electric Pump Shutoff)

See Figure 2 and refer to Table 1 for a list of the Control Module components.

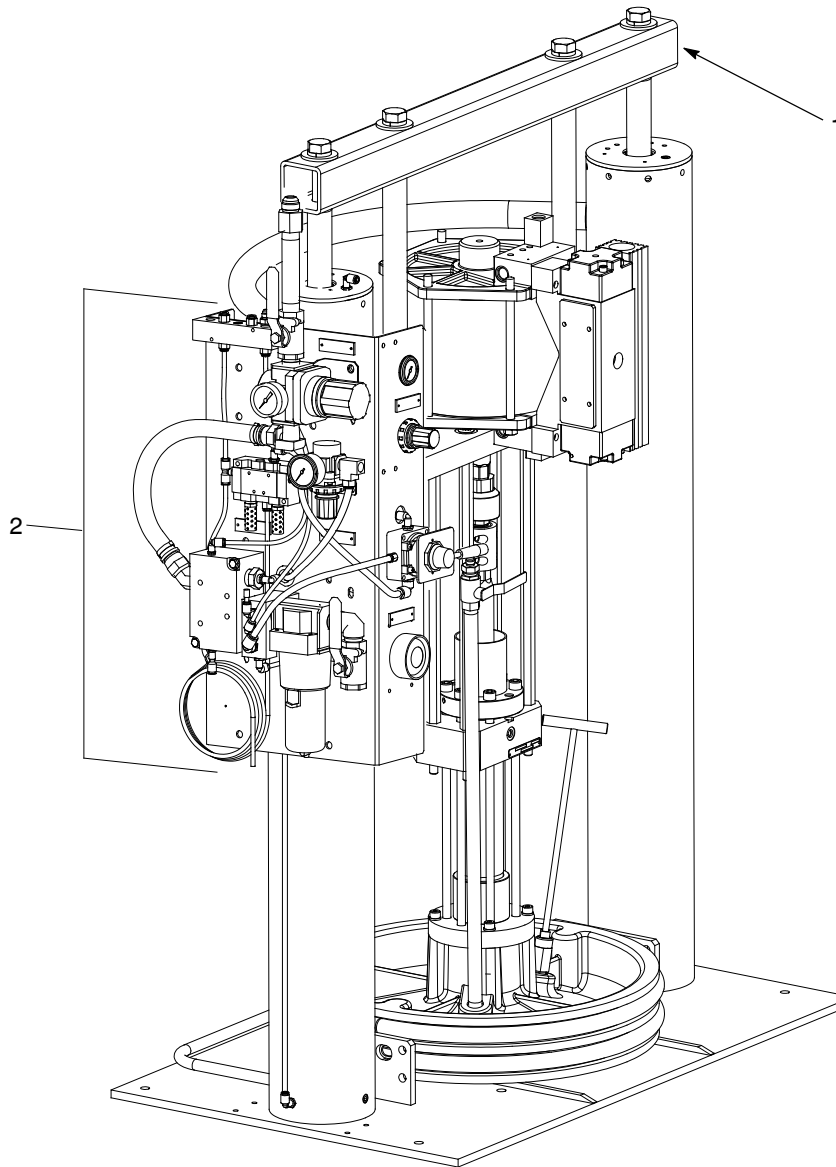


Figure 1 Control Module

Note: Manual Operation Without Electric Pump Shutoff and Large Frame Rhino SD/XD Bulk Unloader Shown

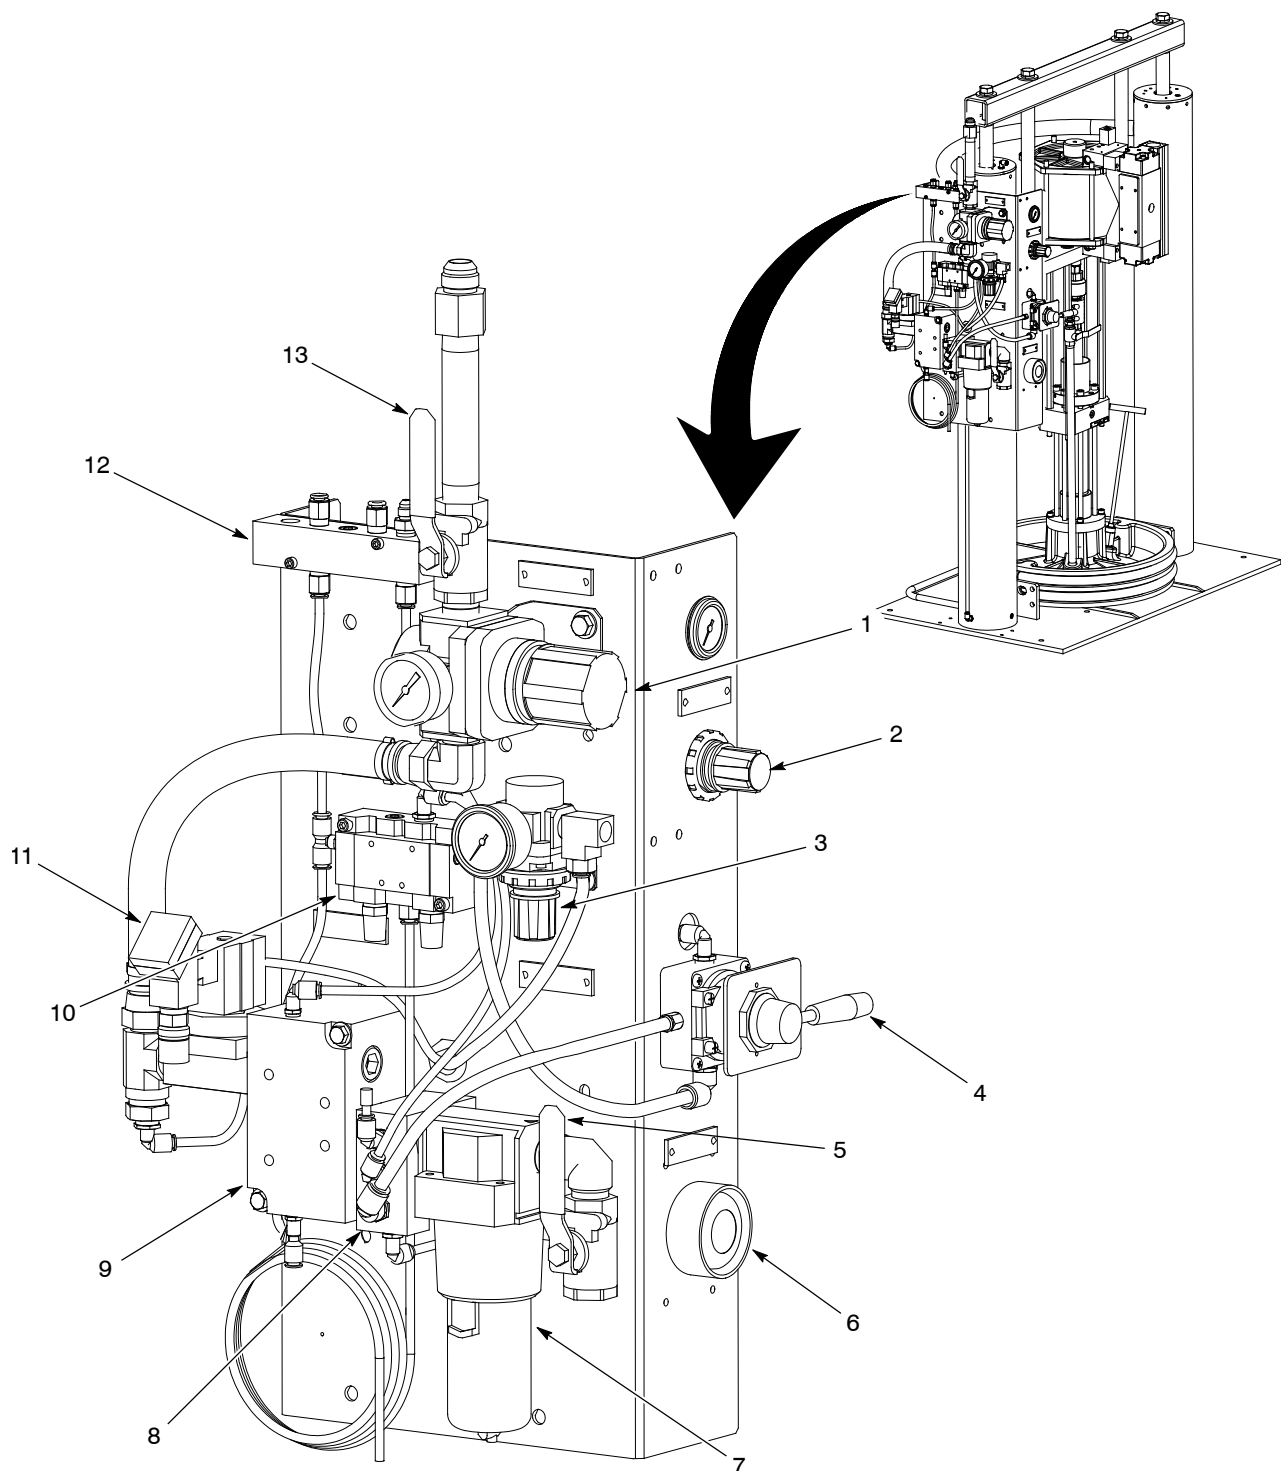


Figure 2 Control Module Components

Note: 24 Vdc MS Connector Control Module Shown

Table 1 Control Module Components

Item	Function
1	Air Motor Regulator: Sets the amount of air pressure going to the air motor which determines the amount of material pressure exiting the unloader.
2	Ram Down Regulator: Sets the amount of air pressure going to the top of the ram cylinders which determines the amount of pressure the follower plate exerts on the material.
3	Preset 25-psi Rating Blow-off/Ram Up Regulator: This regulator controls the air pressure to the blow-off valve and the ram up side of the elevator cylinders.
4	Ram Control Valve: Rotary valve that initiates ram movement. Placing the ram control valve in the • RAM UP position, raises the ram and follower plate and supplies air to the blow-off valve. • NEUTRAL position, halts ram movement. • RAM DOWN position, lowers the ram and follower plate assembly into the material container. NOTE: When the ram control valve is in the NEUTRAL position, air pressure remains in the unloader ram cylinders. The elevator rams will drift downward if they are not supported by either the follower plate resting in a drum of material or on the base plate.
5	Master Air Lockout Valve: When this valve is in the open position, it supplies air to the unloader pneumatic circuit. Closing this valve, disables the unloader.
6	Material Purge Push Button: Supplies air to the air motor and allows the pump to purge material or air from the system. Allows the operator to purge an unloader even if the opposite unloader is active.
7	Filter/Separator: Has a 5-micron filter element that removes most contaminants and moisture from the supply air.
8	Main Air Manifold: Supplies line pressure to various components.
9	Air Motor Control Valve: Receives signals from the air logic valve to control the air motor.
10	Air Logic Valve: Prevents an empty unloader from receiving an Empty signal from the other controller.
11	Electric Pump Control: This valve cuts off the air to the air motor and overrides the air logic circuit.
12	Distribution Manifold: Provides pneumatic connections to the air motor shift valves and empty/low drum level switches.
13	Air Lockout Valve: On each individual unloader, these valves lock out and vent air pressure to the individual air motors. They prevent the pump from stroking but do not shut off ram air. The follower plate can be raised and lowered but the air motor will not activate and cause the pump to stroke.

Installation



WARNING: Allow only qualified personnel to perform the following tasks. Follow the safety instructions in this document and all other related documentation.

NOTE: Read and understand the *Safety* section in the Nordson *System Documentation* that shipped with the system before installing the Control Module.

Install the Control Module to a Bulk Unloader Frame

See Figure 3. Mount the Control Module onto the bulk unloader using the supplied screws (1) and washers (2). Tighten the screws securely.

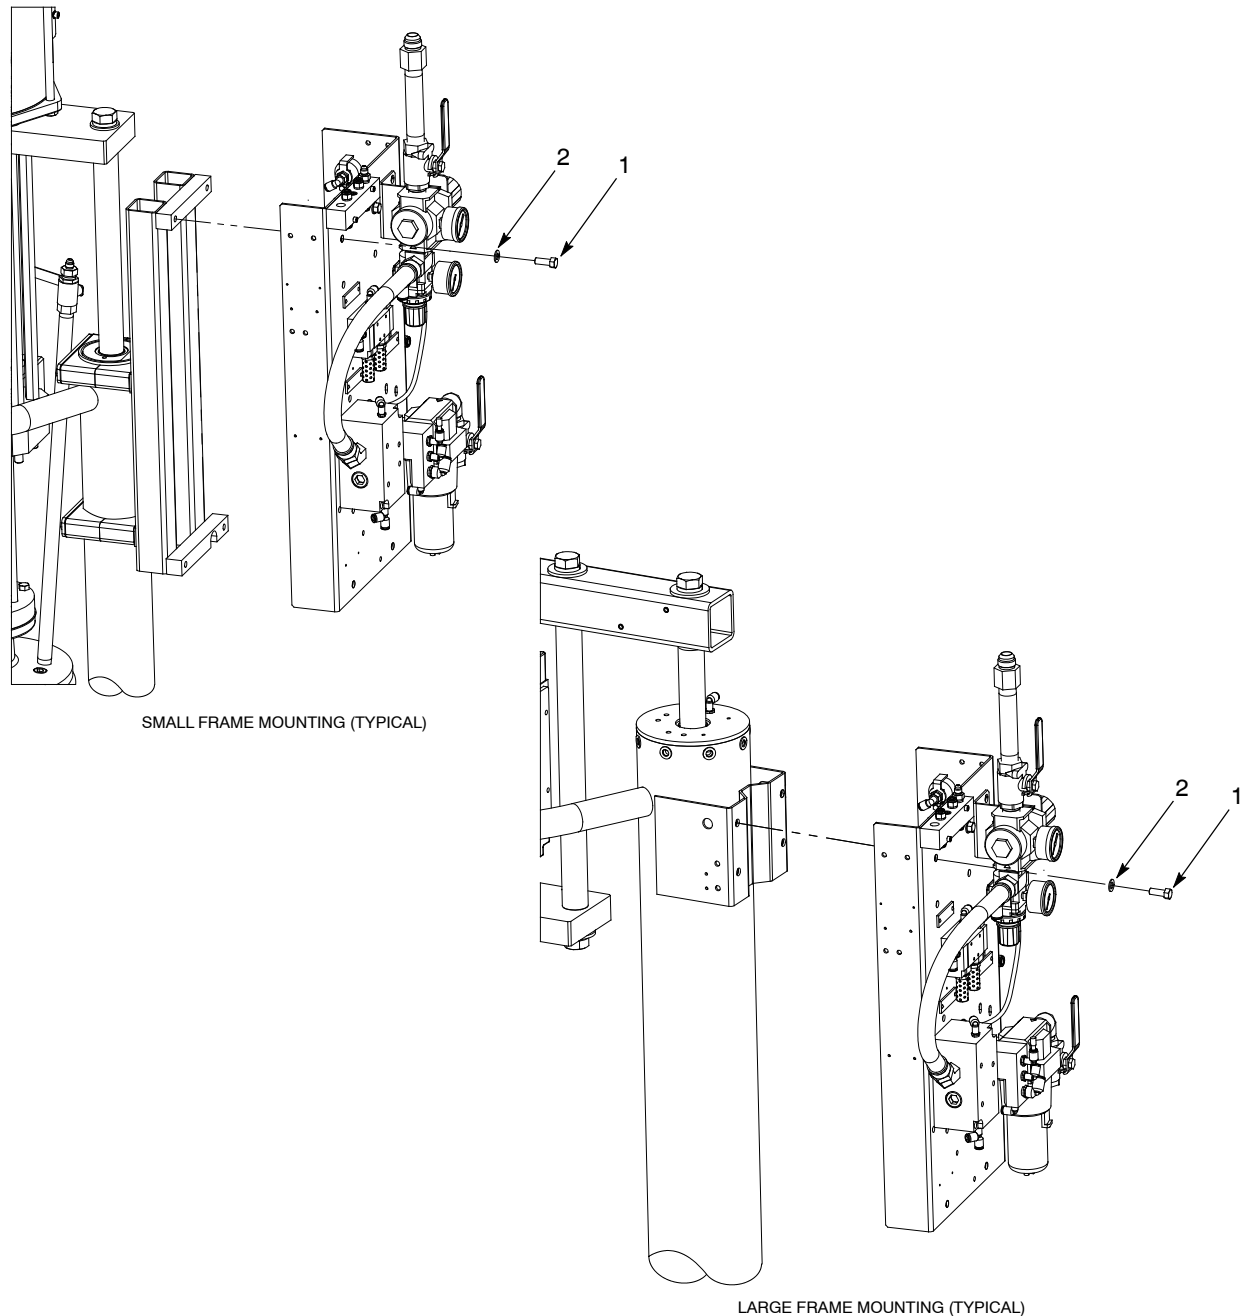


Figure 3 Installing a Control Module

Connect the Ram Up and Ram Down Tubing

1. See Figure 4. Connect the ram up tubing (1) as shown.
2. Connect the ram down tubing (3) between the regulator (2) and frame fitting (4).

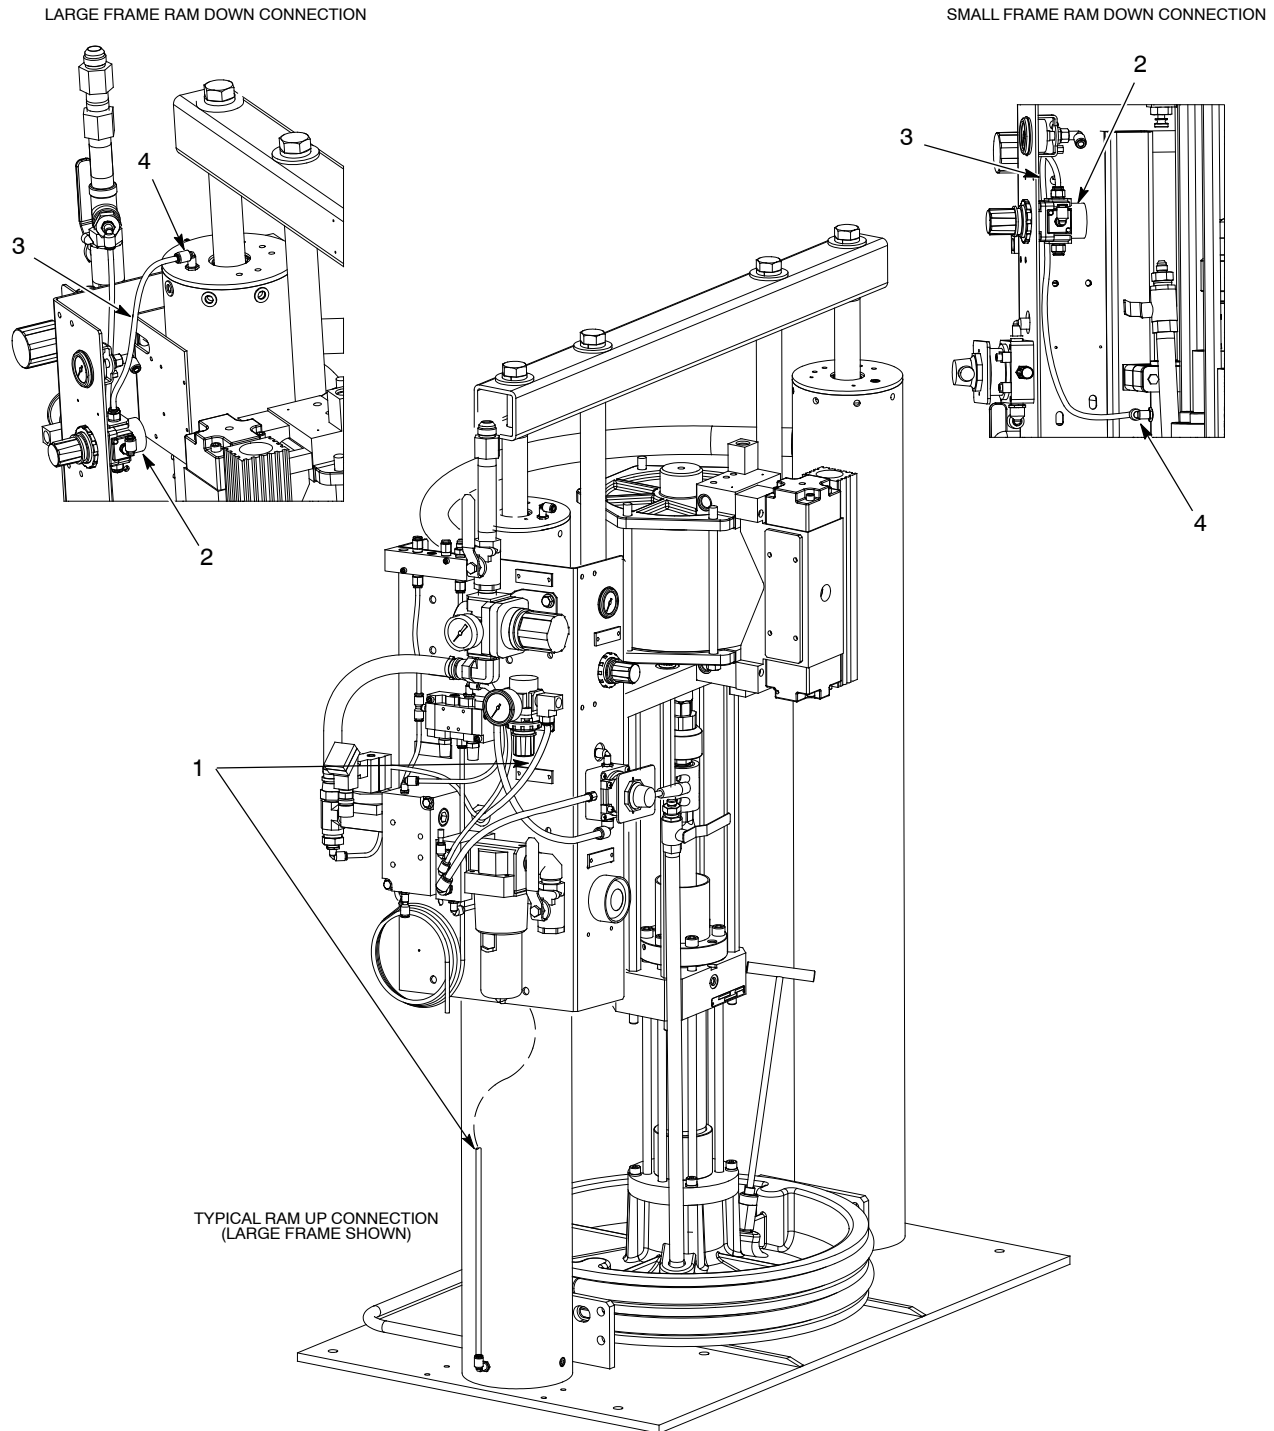


Figure 4 Ram Up and Ram Down Tubing Connections

Connect the Tubing for Standalone or Changeover Configurations

The Control module can be configured for standalone and changeover systems. Perform the applicable procedures.

Standalone Systems

1. See Figure 5. Remove the plug (2) from PORT S1 on the main air manifold (3). Install the plug into the T-fitting on the air motor control valve (4).
2. Cut the tubing (1A) connected to the air logic valve (5) to approximately 7 inches.
3. Connect the 7-inch piece of tubing (1B) from the air logic valve (5) to PORT S1 on the main air manifold (3).

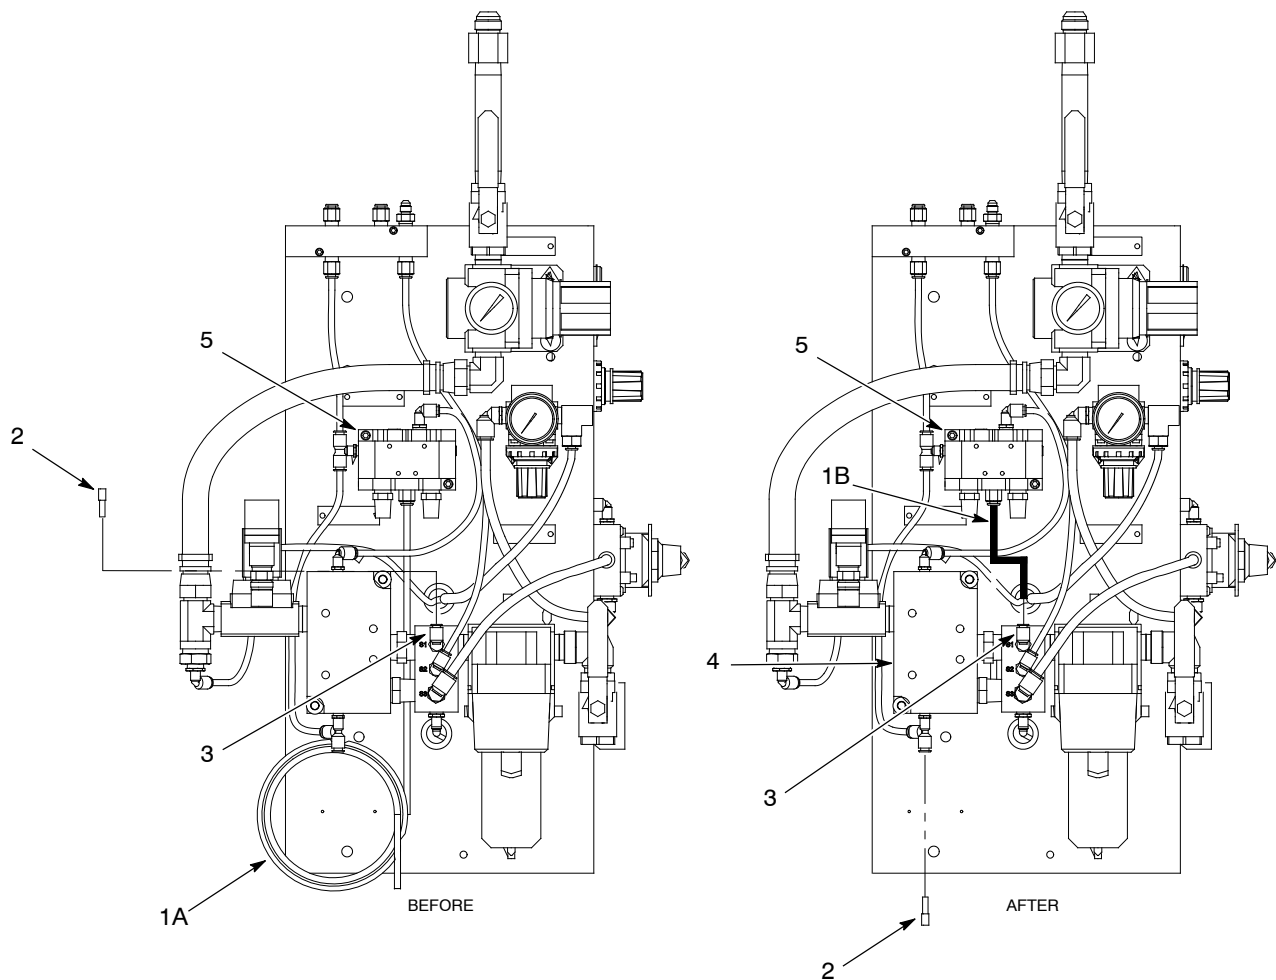


Figure 5 Typical Standalone Configuration

Changeover Systems

Connect the tubing as shown on Figure 6.

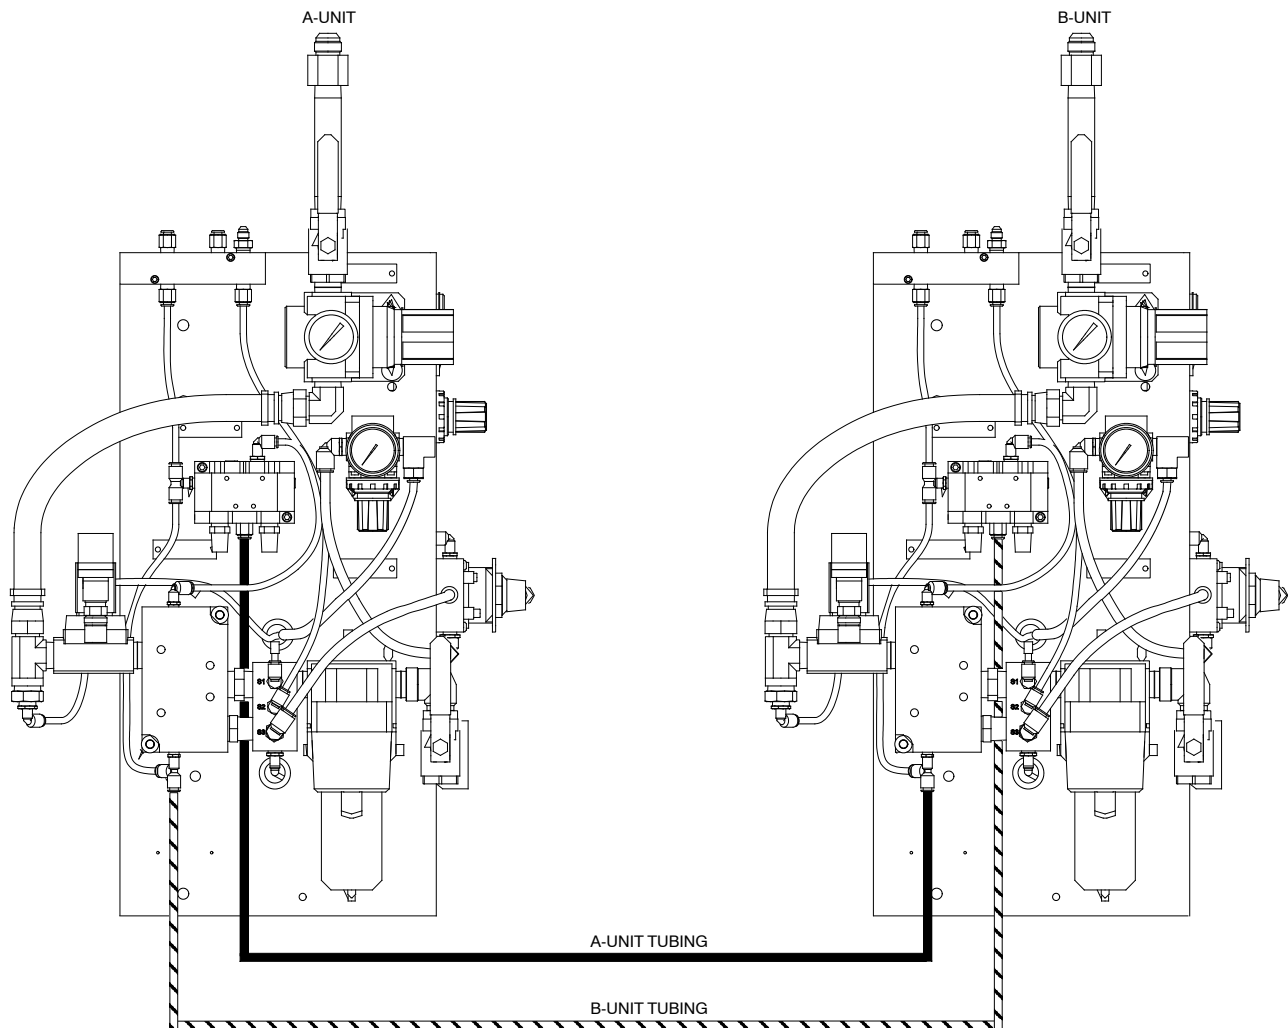


Figure 6 Typical Changeover Configuration

Install an Air Motor Control Valve

See Figure 7. Install the desired air motor control valve (5) to the valve manifold base (4) using the screws (6). Tighten the screws securely.

Install an Air Logic Valve

See Figure 7. Install the desired air logic valve (2) to the air logic valve manifold base (1) using the screws (3). Tighten the screws securely.

Operation

Control Module operation is dependent upon the system application. Refer to the Nordson *System Documentation* that shipped with the system for specific application parameters and operating procedures.

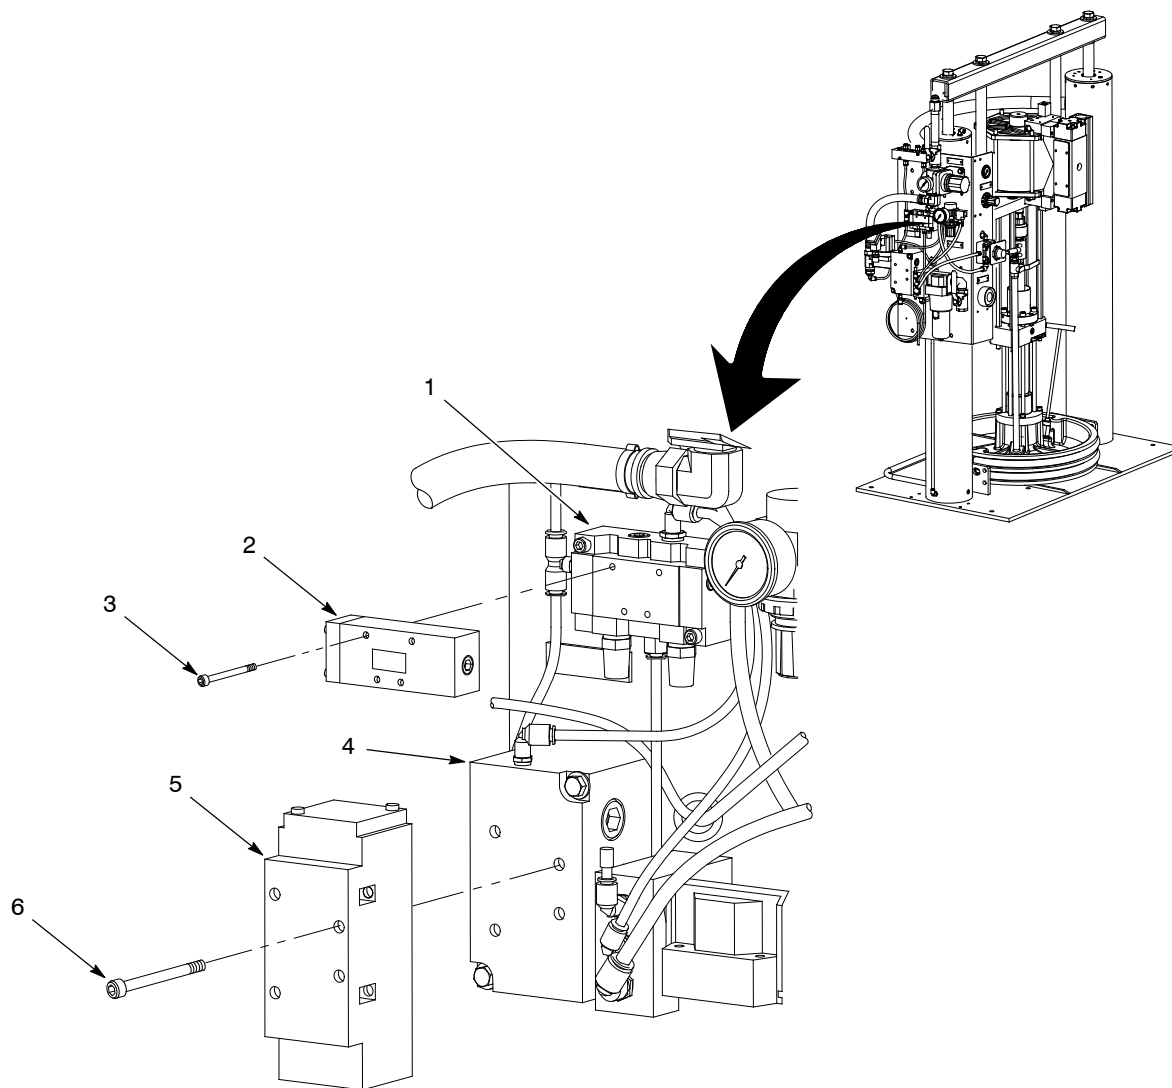


Figure 7 Typical Air Motor Control Valve and Air Logic Valve Installation

Parts

To order parts, call the Nordson Customer Service Center or your local Nordson representative.

MS/Micro Connector Control Modules

See Figures 8 and 9. Refer to the following parts list.

Item	Part	Description	Qty	Note
—	1044771	Module, controls, pneumatic, glass 24 vdc, MS Connector	1	
—	1044772	Module, controls, pneumatic, glass 120 vac, MS Connector	1	
—	1063382	Module, controls, pneumatic, glass 24 vdc, Micro Connector	1	
1	1046891	• Panel, controls, bulk unloader	1	
2	901245	• Gage, pressure, 0-100 psi (0-7 Bar)	1	
3	1043084	• Regulator, air, $\frac{1}{4}$ NPT, with check valve, panel mounted	1	
4	124797	• Valve, rotary, 3 position, $\frac{1}{4}$ ports	1	
5	901252	• Gage, air, $\frac{1}{4}$ NPT, psi-kpa-Kg/Cm2	1	
6	164639	• Valve, manual, push button, with cup	1	
7	-----	• NOT USED ON THIS CONFIGURATION	—	
8	1029522	• Regulator, $\frac{3}{4}$ NPT, 8-125 psi	1	
9	1049271	• Regulator, $\frac{3}{8}$ NPT, 50 psi, with check	1	
10	-----	• NOT USED ON THIS CONFIGURATION	—	
11	1029534	• Base, manifold, ISO 5599, Size 1, $\frac{1}{4}$ NPT	1	
12	1029553	• Base, manifold, ISO 5599, Size 3, $\frac{3}{4}$ NPT	1	
13	1029952	• Manifold	1	
14	1029533	• Filter, air, $\frac{3}{4}$ NPT	1	
15	1030866	• Valve, ball, vented, $\frac{3}{4}$ NPT	2	
16	-----	• NOT USED ON THIS CONFIGURATION	—	
17	324896	• Grommet, rubber, 0.812 ID x 1.25 OD	2	
18	-----	• NOT USED ON THIS CONFIGURATION	—	
19	973252	• Nipple, hex, $\frac{3}{4}$ x $\frac{3}{4}$ x 1.96	1	
20	973103	• Nipple, stl, schedule 40, $\frac{3}{4}$, 1.37	4	
21	1041612	• Tee, male, branch, $\frac{3}{4}$ NPT, $\frac{3}{4}$ FPT, $\frac{3}{4}$ T	1	
22	973417	• Bushing, pipe, hyd, $\frac{3}{4}$ x $\frac{3}{8}$	1	
23	327109	• Nipple, stl, Schedule 40, $\frac{3}{4}$ x 6, galvanized	1	
24	1030650	• Connector, female, 37, 1- $\frac{1}{16}$ -12 x $\frac{3}{4}$, stl zinc	1	
25	972583	• Ell, male, 37, 1- $\frac{1}{16}$ -12 x $\frac{3}{4}$, stl	1	
26	124795	• Fitting, hose, $\frac{3}{4}$ barb x 1 $\frac{1}{16}$	2	
27	-----	• NOT USED ON THIS CONFIGURATION	—	
28	973442	• Plug, pipe, socket, flush, $\frac{3}{4}$, zinc	2	
29	124851	• Muffler, $\frac{3}{4}$ NPT, 40 micron	1	
30	973226	• Ell, pipe, $\frac{3}{4}$ stl	1	
31-32	-----	• NOT USED ON THIS CONFIGURATION	—	
33	972194	• Elbow, male, $\frac{3}{8}$ tube x $\frac{3}{8}$	1	
34	972216	• Elbow, male, $\frac{1}{4}$ tube x $\frac{3}{8}$ NPT	1	
35	971177	• Connector, male, $\frac{3}{8}$ tube x $\frac{1}{4}$ NPT	1	
36	971265	• Connector, male, $\frac{1}{4}$ tube x $\frac{1}{4}$ NPT	7	
37	971266	• Elbow, male, $\frac{1}{4}$ tube x $\frac{1}{4}$ NPT	5	
38	972183	• Elbow, male, $\frac{3}{8}$ tube x $\frac{1}{4}$ NPT	2	
39	177452	• Muffler, $\frac{3}{8}$ NPTF	2	
40	1040700	• Elbow, female, push-in, $\frac{1}{4}$ tube x $\frac{1}{8}$ FPT	1	
41	972119	• Elbow, $\frac{1}{4}$ tube x $\frac{1}{8}$ NPT	4	
42	972000	• Connector, male, 37, $\frac{7}{16}$ -20 x $\frac{1}{4}$, stl	1	
43	973483	• Plug, pipe, socket, $\frac{1}{8}$ in., steel	2	

Continued...

Item	Part	Description	Qty	Note
—	1044771	Module, controls, pneumatic, glass 24 vdc, MS Connector	1	
—	1044772	Module, controls, pneumatic, glass 120 vac, MS Connector	1	
—	1063382	Module, controls, pneumatic, glass 24 vdc, Micro Connector	1	
44	1030359	• Plug, push-in, 1/4 tube	2	
45	973431	• Plug, pipe, socket, standard, 1/2, zinc	1	
46	1010810	• Tubing, 1/4 OD Polyethylene, flame-resistant	AR	
47	1010777	• Tubing, 3/8 OD Polyethylene, flame-resistant	AR	
48	-----	• NOT USED ON THIS CONFIGURATION	—	
49	124792	• Hose, 0.75 ID, 200 psi	AR	
50	981710	• Screw, hex, 3/8-16x 0.750, cap, zinc	4	
51	-----	• NOT USED ON THIS CONFIGURATION	—	
52	981402	• Screw, hex, 3/8-16 x 1	4	
53	983160	• Washer, flat, E, spt, 3/8	4	
54	983061	• Washer, flat, E, 0.406 x 0.812 x 0.065, zinc	8	
55	345840	• Nut, hex, regular, 3/8-16, zinc	4	
56	981314	• Screw, hex, 5/16-18 x 3.500, cap, zinc	2	
57	981557	• Screw, socket, 1/4-20 x 1.750, zinc	2	
58	345836	• Nut, hex, 1/4-20, stl, zinc, 14441-GA	4	
59	345977	• Washer, lock, E, 1/4, stl, zinc, 14451-GA	4	
60	971672	• Connector, male, 1/4 tube x 3/8 NPT	1	
61	973278	• Connector, male, run tee, 1/4 tube x 1/8 NPT	1	
62	973615	• Tee, branch, 1/4 tube x 1/8 NPT	1	
63	984120	• Nut, hex, machined, #10-32, stl, zinc, 14448-FA	4	
64	981176	• Screw, pan, 10-32 x 1.500, sl, zinc	4	
65	983123	• Washer, flat, E, 0.219 x 0.500 x 0.049, zinc	4	
66	983120	• Washer, lock, E, spt, #10, Stl, Ni	4	
67	-----	• NOT USED ON THIS CONFIGURATION	—	
68	981907	• Screw, drive, rd, 4 x 0.250, zinc	12	
69	981211	• Screw, hex, 1/4-20 x 0.750, cap	2	
70	345913	• Washer, flat, regular, 1/4, zinc	2	
71	1034396	• Muffle, exhaust, 1/4 NPT	1	
72	973276	• Tee, pipe, straight, 3/8 x 3/8, brass	1	
73-74	-----	• NOT USED ON THIS CONFIGURATION	—	
75	1049272	• Label kit	1	
76	973410	• Plug, pipe, socket, 1/4 zinc	2	
77A	1030560	• Valve, 2-port, 3/4 NPT, 24 vdc, 5-pin MS connector (FOR USE ON 24 VDC ISO CONTROL VALVE MODULE 1044771)	1	
77B	1040904	• Valve, 2-port, 3/4 NPT, 110 vac, 5-pin MS connector (FOR USE ON 120 VAC ISO VALVE CONTROL MODULE 1044772)	1	
77C	1049396	• Valve, 2-port, 3/4 NPT, 24 vdc, 4-pin Micro (FOR USE ON 24 VDC MICRO VALVE CONTROL MODULE 1063382)	1	
78	983051	• Washer, flat, E, 0.344 x 0.688 x 0.065 zinc	2	
79	345938	• Washer, flat, E, 0.375 x 0.875 x 0.083 zinc	2	
80	345978	• Washer, lock, regular, 5/16	2	
81	984449	• Nut, hex, regular, 5/16-18, G8, zinc	2	
82	901228	• Gage, air, 0-100 psi, 0-7 kg/cm	1	
83	983083	• Flat washer, 0.438 x 1 x 0.083	2	
84	1004377	• Clamp, hose, 1.125, crimp, double-ear	2	
85	1065690	• Bracket, mounting, regulator, 3/4 NPT	1	
86	1065691	• Bracket, mounting, filter, 3/4 NPT	1	
AR: As Required				

Manual Operation Without Electric Pump Shutoff Control Module

See Figures 10 and 11. Refer to the following parts list.

Item	Part	Description	Qty	Note
—	1058170	Module, controls, pneumatic, glass, manual	1	
1	1046891	• Panel, controls, bulk unloader	1	
2	901245	• Gage, pressure, 0-100 psi (0-7 Bar)	1	
3	1043084	• Regulator, air, 1/4 NPT, with check valve, panel mounted	1	
4	124797	• Valve, rotary, 3 position, 1/4 ports	1	
5	901252	• Gage, air, 1/4 NPT, psi-kpa-Kg/Cm2	1	
6	164639	• Valve, manual, push button, with cup	1	
7	-----	• NOT USED ON THIS CONFIGURATION	—	
8	1029522	• Regulator, 3/4 NPT, 8-125 psi	1	
9	1049271	• Regulator, 3/8 NPT, 50 psi, with check	1	
10	-----	• NOT USED ON THIS CONFIGURATION	—	
11	1029534	• Base, manifold, ISO 5599, Size 1, 1/4 NPT	1	
12	1029553	• Base, manifold, ISO 5599, Size 3, 3/4 NPT	1	
13	1029952	• Manifold	1	
14	1029533	• Filter, air, 3/4 NPT	1	
15	1030866	• Valve, ball, vented, 3/4 NPT	2	
16	-----	• NOT USED ON THIS CONFIGURATION	—	
17	324896	• Grommet, rubber, 0.812 ID x 1.25 OD	2	
18	-----	• NOT USED ON THIS CONFIGURATION	—	
19	973252	• Nipple, hex, 3/4 x 3/4 x 1.96	1	
20	973103	• Nipple, stl, schedule 40, 3/4, 1.37	3	
21	241040	• Muffler, exhaust, 1/8 in. NPT	1	
22	973262	• Bushing, pipe, hyd, 3/4 x 1/4, stl, zinc	1	
23	327109	• Nipple, stl, Schedule 40, 3/4 x 6, galvanized	1	
24	1030650	• Connector, female, 37, 1-1/16-12 x 3/4, stl zinc	1	
25	972583	• Ell, male, 37, 1-1/16-12 x 3/4, stl	1	
26	124795	• Fitting, hose, 3/4 barb x 1/16	2	
27	973140	• Elbow, male, 45d, 3/4 NPT x 1 1 ???	1	
28	973442	• Plug, pipe, socket, flush, 3/4, zinc	1	
29	124851	• Muffler, 3/4 NPT, 40 micron	1	
30	973226	• Ell, pipe, 3/4 stl	1	
31-32	-----	• NOT USED ON THIS CONFIGURATION	—	
33	972194	• Elbow, male, 3/8 tube x 3/8	1	
34	-----	• NOT USED ON THIS CONFIGURATION	—	
35	971177	• Connector, male, 3/8 tube x 1/4 NPT	1	
36	971265	• Connector, male, 1/4 tube x 1/4 NPT	7	
37	971266	• Elbow, male, 1/4 tube x 1/4 NPT	6	
38	972183	• Elbow, male, 3/8 tube x 1/4 NPT	2	
39	1019099	• Muffler, 3/8 NPT male	2	
40	1040700	• Elbow, female, push-in, 1/4 tube x 1/8 FPT	1	
41	972119	• Elbow, 1/4 tube x 1/8 NPT	4	
42	972000	• Connector, male, 37, 7/16-20 x 1/4, stl	1	

Continued...

Item	Part	Description	Qty	Note
—	1044765	Module, controls, pneumatic		
43	973483	• Plug, pipe, socket, 1/8 in., steel	1	
44	1030359	• Plug, push-in, 1/4 tube	1	
45	973431	• Plug, pipe, socket, standard, 1/2, zinc	1	
46	1010810	• Tubing, 1/4 OD Polyethylene, flame-resistant	AR	
47	1010777	• Tubing, 3/8 OD Polyethylene, flame-resistant	AR	
48	-----	• NOT USED ON THIS CONFIGURATION	—	
49	124792	• Hose, 0.75 ID, 200 psi	AR	
50	981710	• Screw, hex, 3/8-16x 0.750, cap, zinc	4	
51	-----	• NOT USED ON THIS CONFIGURATION	—	
52	981402	• Screw, hex, 3/8-16 x 1	4	
53	983160	• Washer, flat, E, spt, 3/8	4	
54	983061	• Washer, flat, E, 0.406 x 0.812 x 0.065, zinc	8	
55	345840	• Nut, hex, regular, 3/8-16, zinc	4	
56	981314	• Screw, hex, 5/16-18 x 3.500, cap, zinc	2	
57	981557	• Screw, socket, 1/4-20 x 1.750, zinc	2	
58	345836	• Nut, hex, 1/4-20, stl, zinc, 14441-GA	4	
59	345977	• Washer, lock, E, 1/4, stl, zinc, 14451-GA	4	
60	971672	• Connector, male, 1/4 tube x 3/8 NPT	1	
61	973278	• Connector, male, run tee, 1/4 tube x 1/8 NPT	1	
62	973615	• Tee, branch, 1/4 tube x 1/8 NPT	1	
63	984120	• Nut, hex, machined, #10-32, stl, zinc, 14448-FA	4	
64	981176	• Screw, pan, 10-32 x 1.500, sl, zinc	4	
65	983123	• Washer, flat, E, 0.219 x 0.500 x 0.049, zinc	4	
66	983120	• Washer, lock, E, spt, #10, Stl, Ni	4	
67	-----	• NOT USED ON THIS CONFIGURATION	—	
68	981907	• Screw, drive, rd, 4 x 0.250, zinc	12	
69	981211	• Screw, hex, 1/4-20 x 0.750, cap	2	
70	345913	• Washer, flat, regular, 1/4, zinc	2	
71	1034396	• Muffle, exhaust, 1/4 NPT	1	
72	973276	• Tee, pipe, straight, 3/8 x 3/8, brass	1	
73-74	-----	• NOT USED ON THIS CONFIGURATION	—	
75	1049272	• Label kit	1	
76	973410	• Plug, pipe, socket, 1/4 zinc	2	
77	-----	• NOT USED ON THIS CONFIGURATION	—	
78	983051	• Washer, flat, E, 0.344 x 0.688 x 0.065 zinc	2	
79	345938	• Washer, flat, E, 0.375 x 0.875 x 0.083 zinc	2	
80	345978	• Washer, lock, regular, 5/16	2	
81	984449	• Nut, hex, regular, 5/16-18, G8, zinc	2	
82	901228	• Gage, air, 0-100 psi, 0-7 kg/cm	1	
83	983083	• Flat washer, 0.438 x 1 x 0.083	2	
84	1004377	• Clamp, hose, 1.125, crimp, double-ear	2	
85	1065690	• Bracket, mounting, regulator, 3/4 NPT	1	
86	1065691	• Bracket, mounting, filter, 3/4 NPT	1	
AR: As Required				

Recommended Spare Parts

Keep the following on hand to reduce downtime.

Item	Part
Filter element, 5 micron	1057764

Optional Air Motor Control Valves

The following air motor control valves are available.

Part	Description
1025774	Size 3, air pilot, 2-position, 4-way, Numatics
1025777	Size 3, air pilot, 2-position, 4-way, Mac
1025779	Size 3, air pilot, 2-position, 4-way, Automatic Valve
1057781	Size 3, air pilot, 2-position, 4-way, Parker

Optional Air Logic Valves

The following air logic valves are available.

Part	Description
1025776	Size 1, air pilot, 2-position, 4-way, Numatics
1025778	Size 1, air pilot, 2-position, 4-way, Mac
1025780	Size 1, air pilot, 2-position, 4-way, Automatic Valve
1044436	Size 1, air pilot, 2-position, 4-way, SMC
1057780	Size 1, air pilot, 2-position, 4-way, Parker

Pneumatic Schematics

Refer to Schematic 1038935B01 for the MS/MICRO Connector control modules and 1058169A01 for the Manual Operation Without Electric Pump Shutoff control module. Each schematic shows the following:

Sheet	Description
1	Changeover with Empty Drum Level
2	Standalone with Empty Drum Level
3	Changeover Pump Timer Delay Module with Empty Drum Level
4	Low and Empty Drum Level Detection Option

This page intentionally left blank.

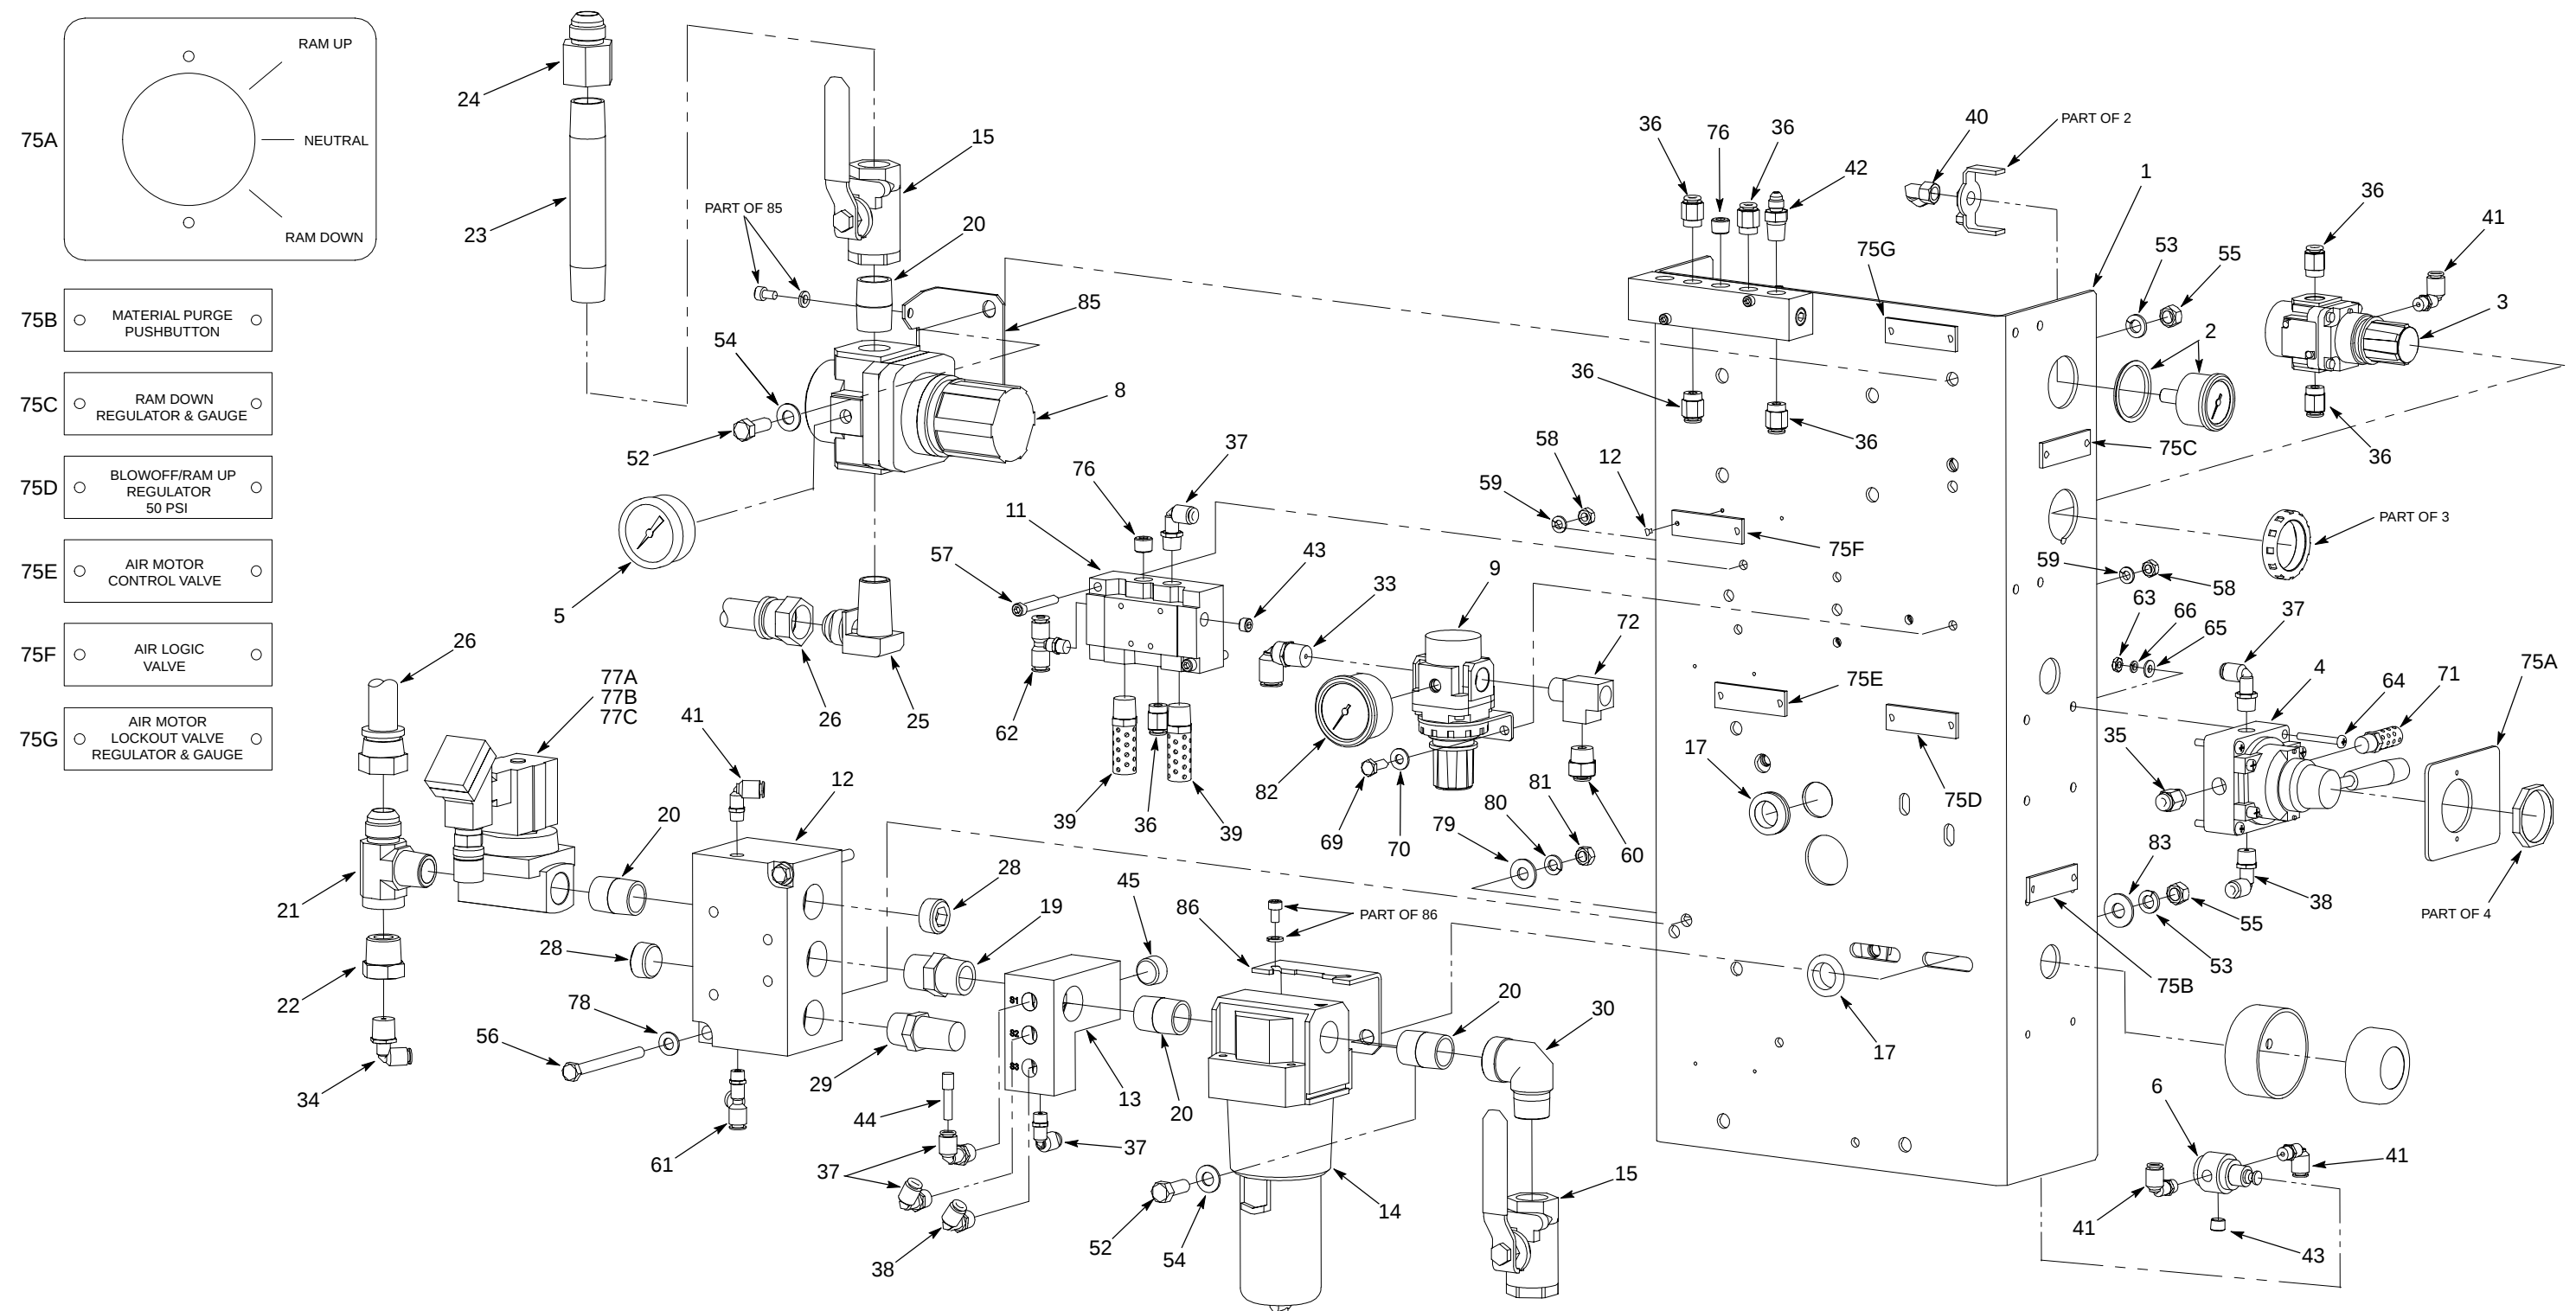


Figure 8 MS/Micro Connector Control Module Parts

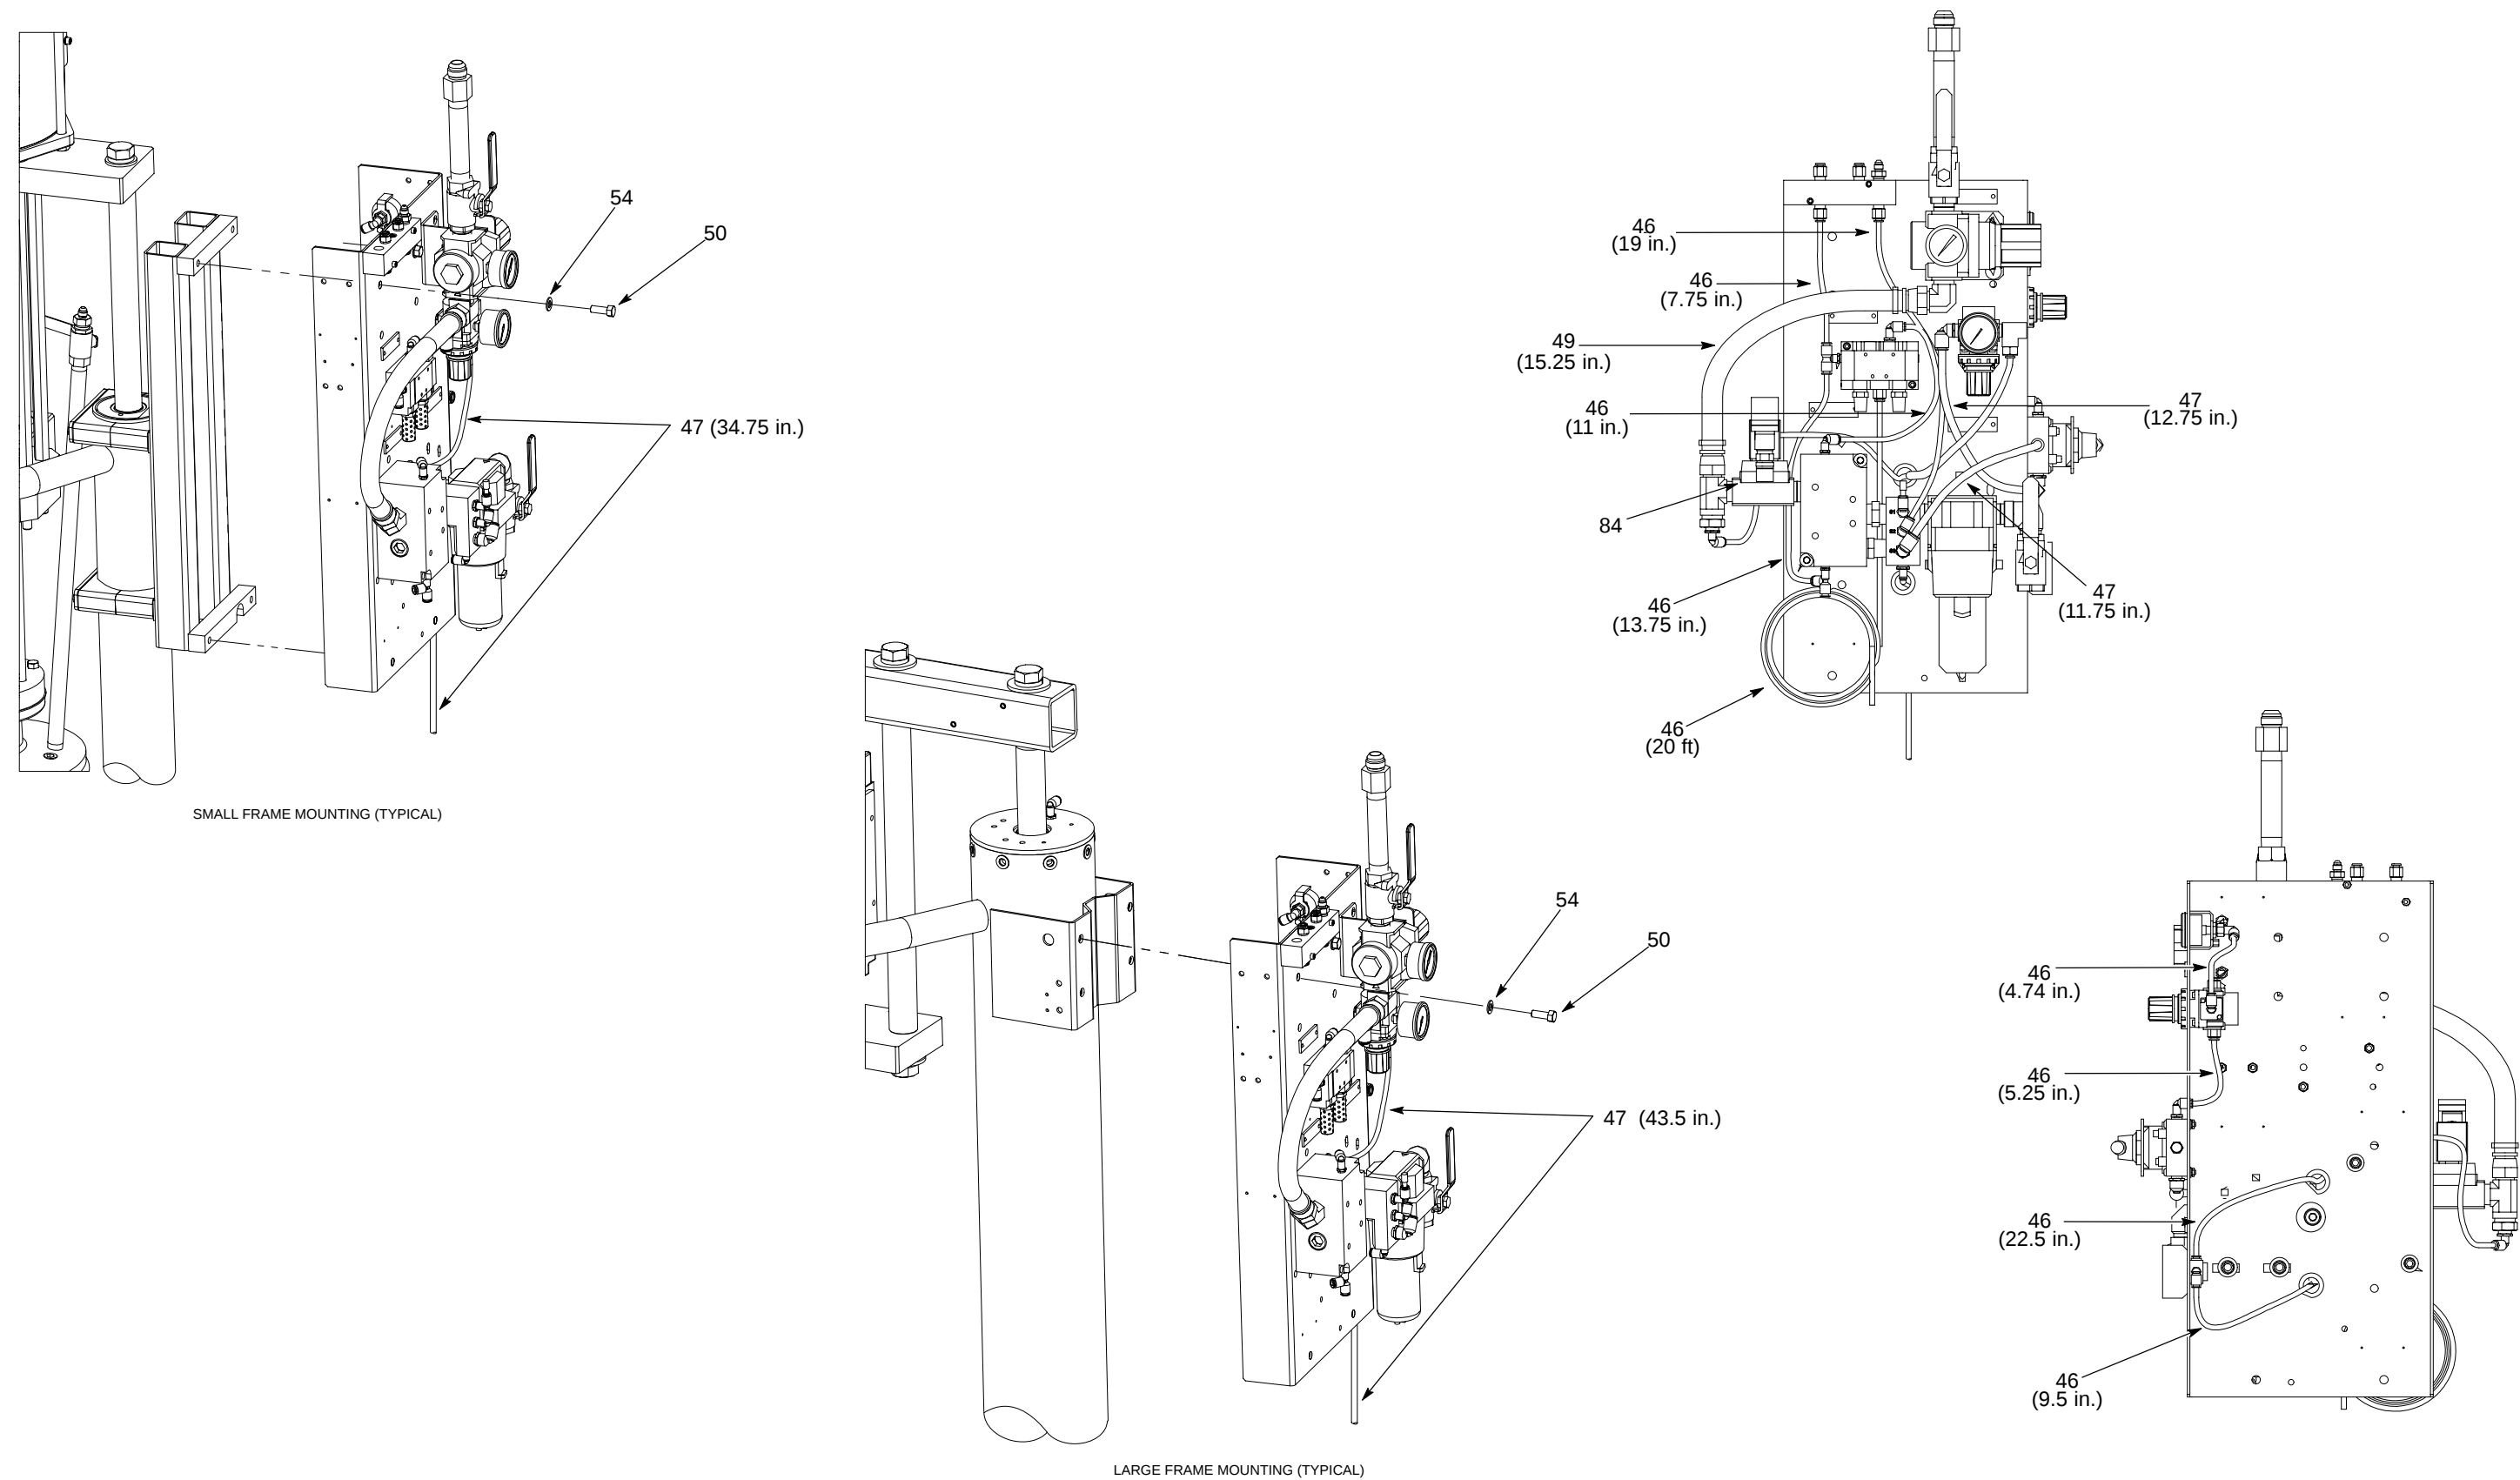


Figure 9 MS/Micro Connector Control Module Parts

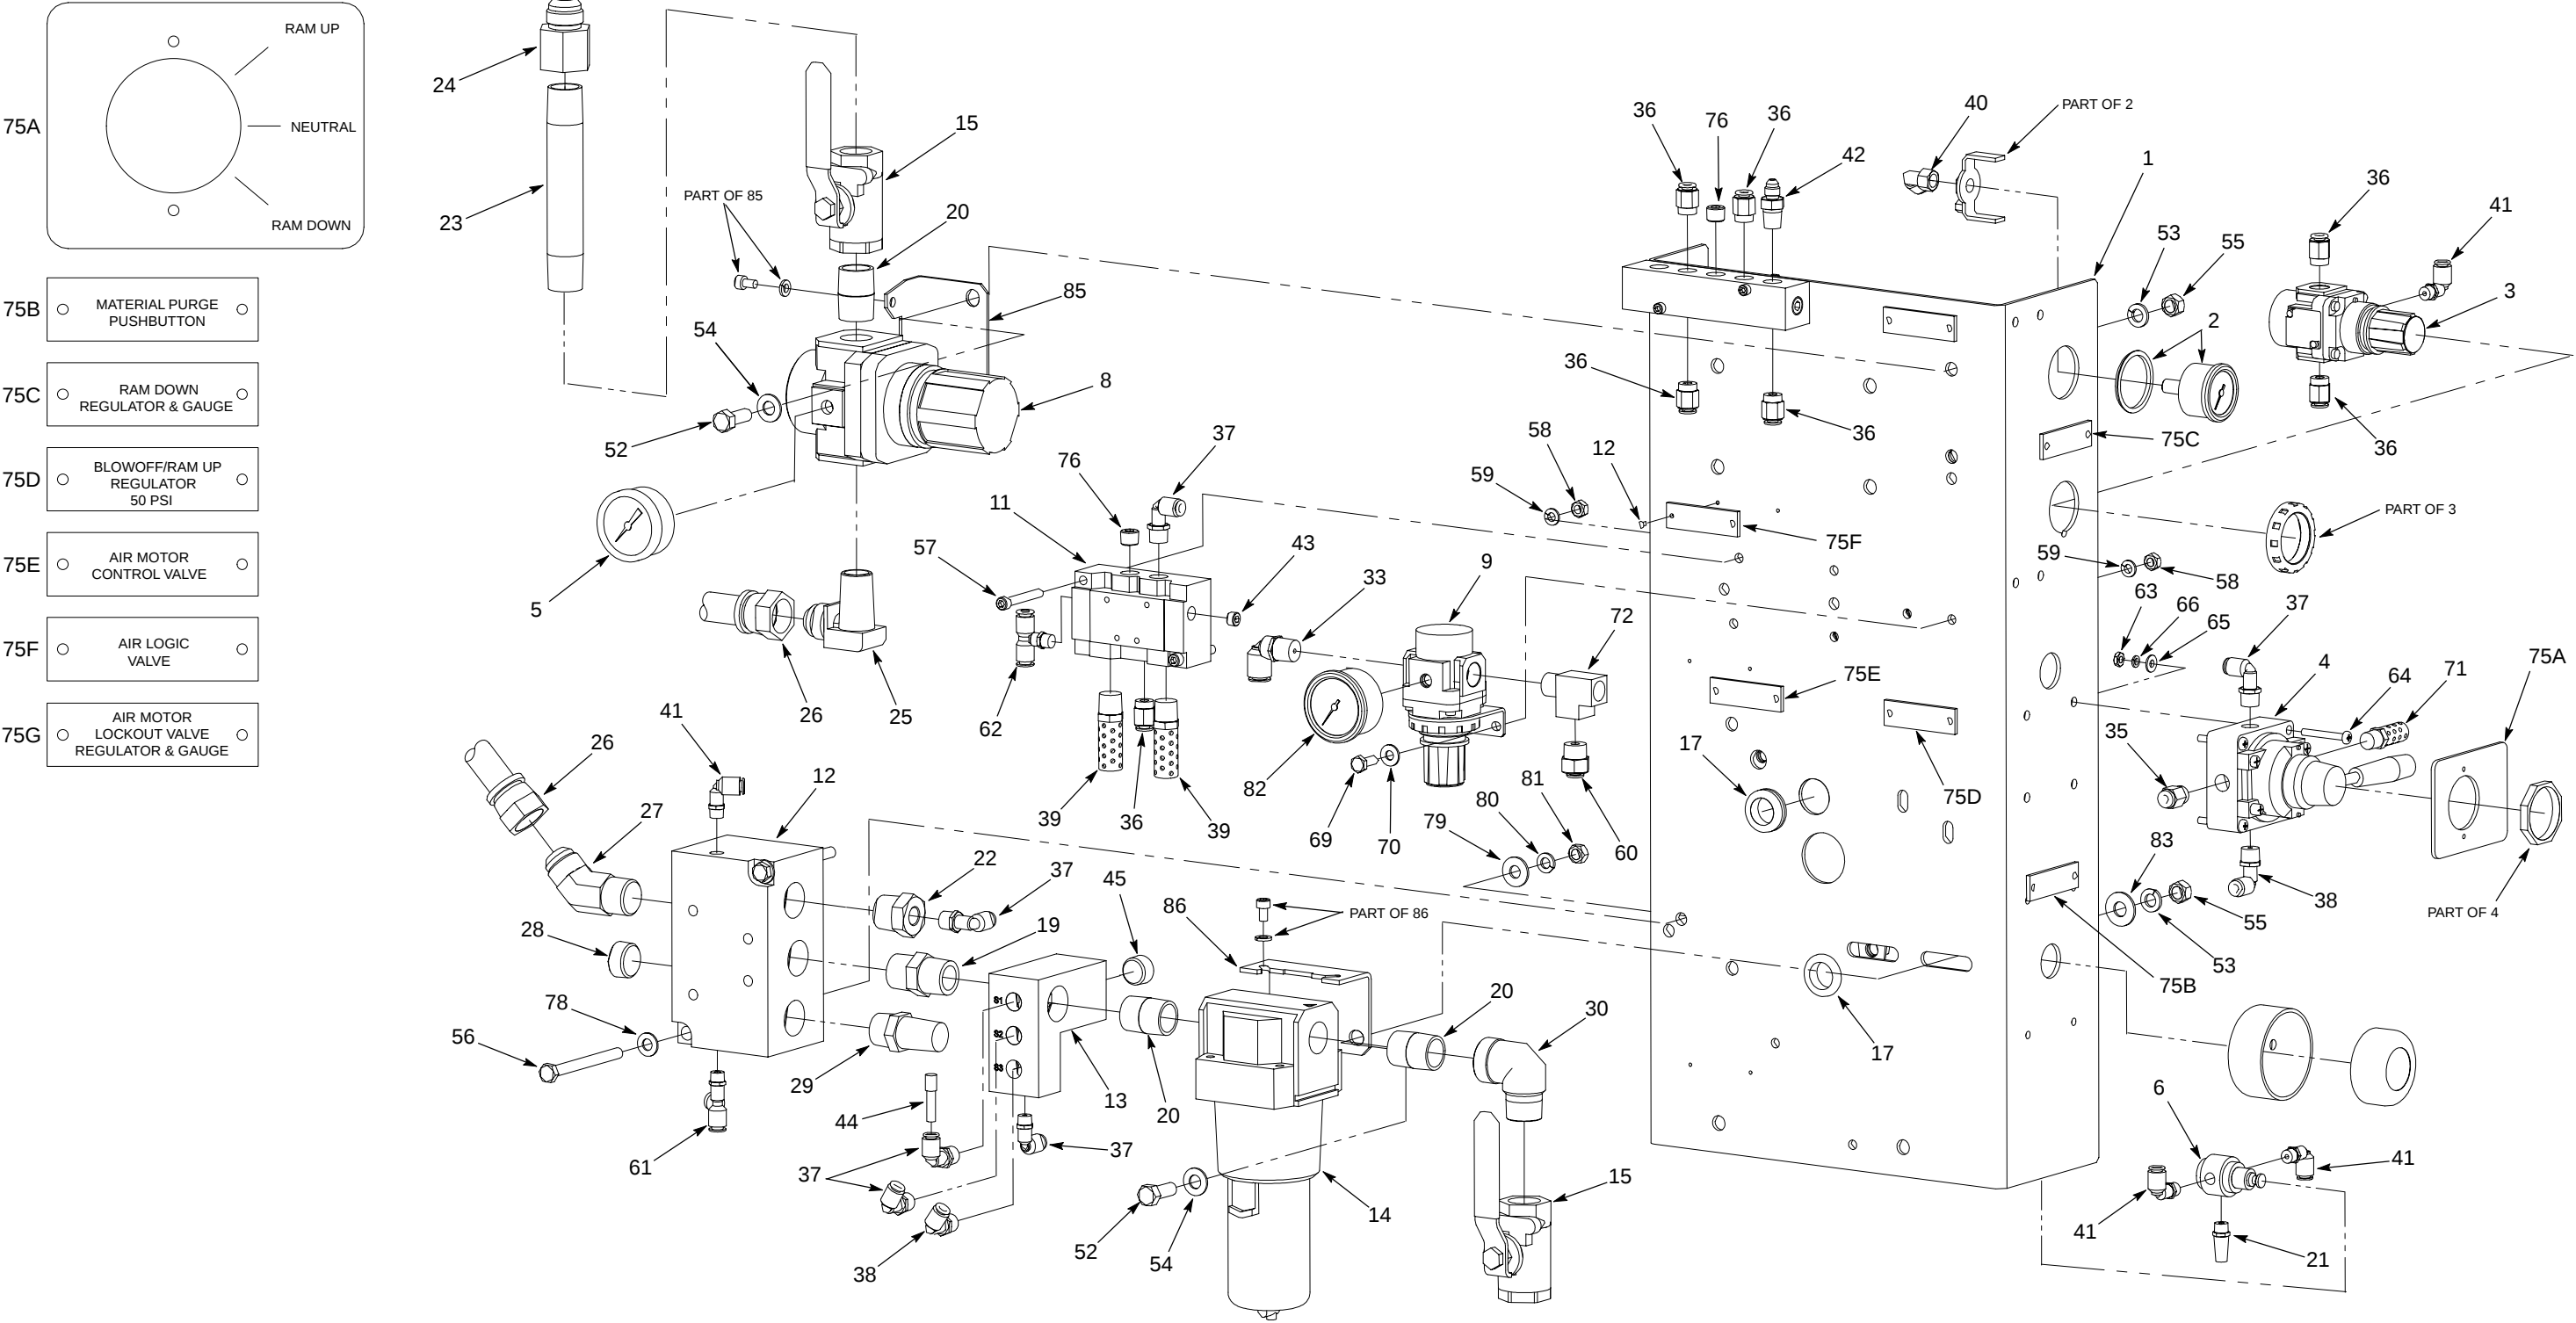


Figure 10 Manual Operation Without Electric Pump Shutoff Control Module Parts


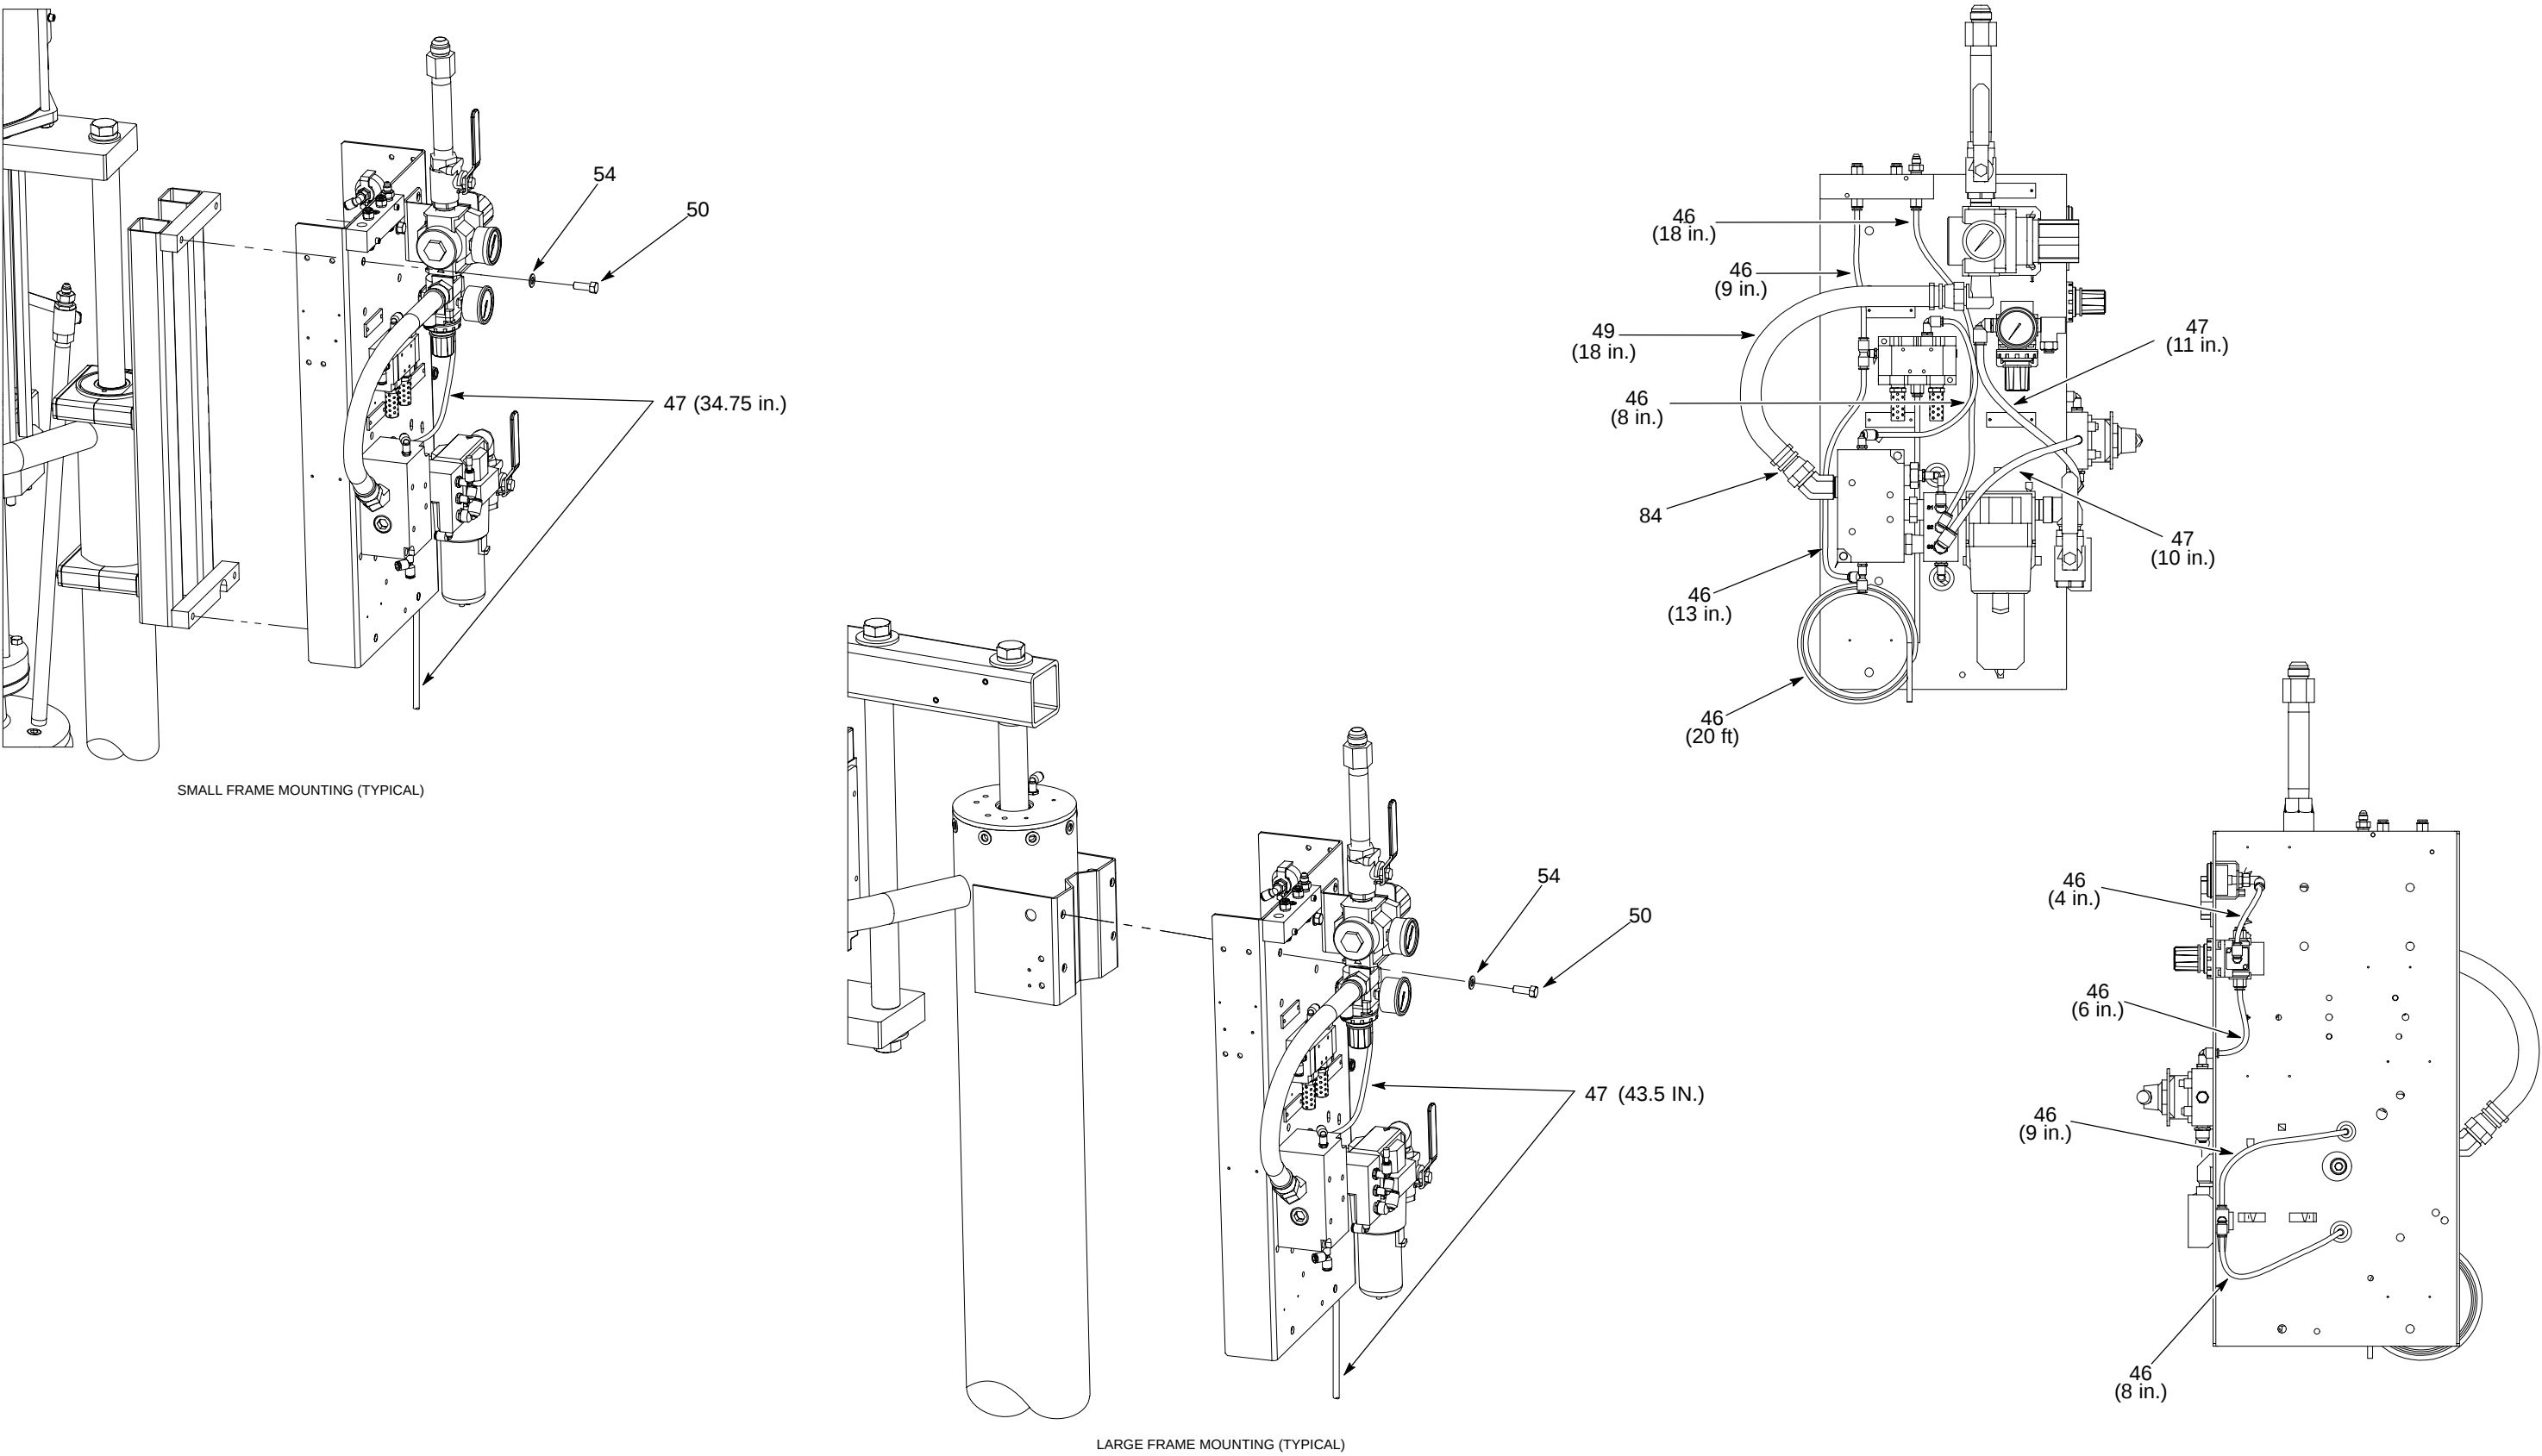



Figure 11 Manual Operation Without Electric Pump Shutoff Control Module Parts

MS/MICRO Connectors Control Module Schematic 1038935B01 (4 Sheets)

SHEET 1: CHANGEOVER WITH EMPTY DRUM LEVEL
SHEET 2: STANDALONE WITH EMPTY DRUM LEVEL
SHEET 3: CHANGEOVER PUMP TIMER DELAY MODULE WITH EMPTY DRUM LEVEL
SHEET 4: LOW AND EMPTY DRUM LEVEL DETECTION OPTION

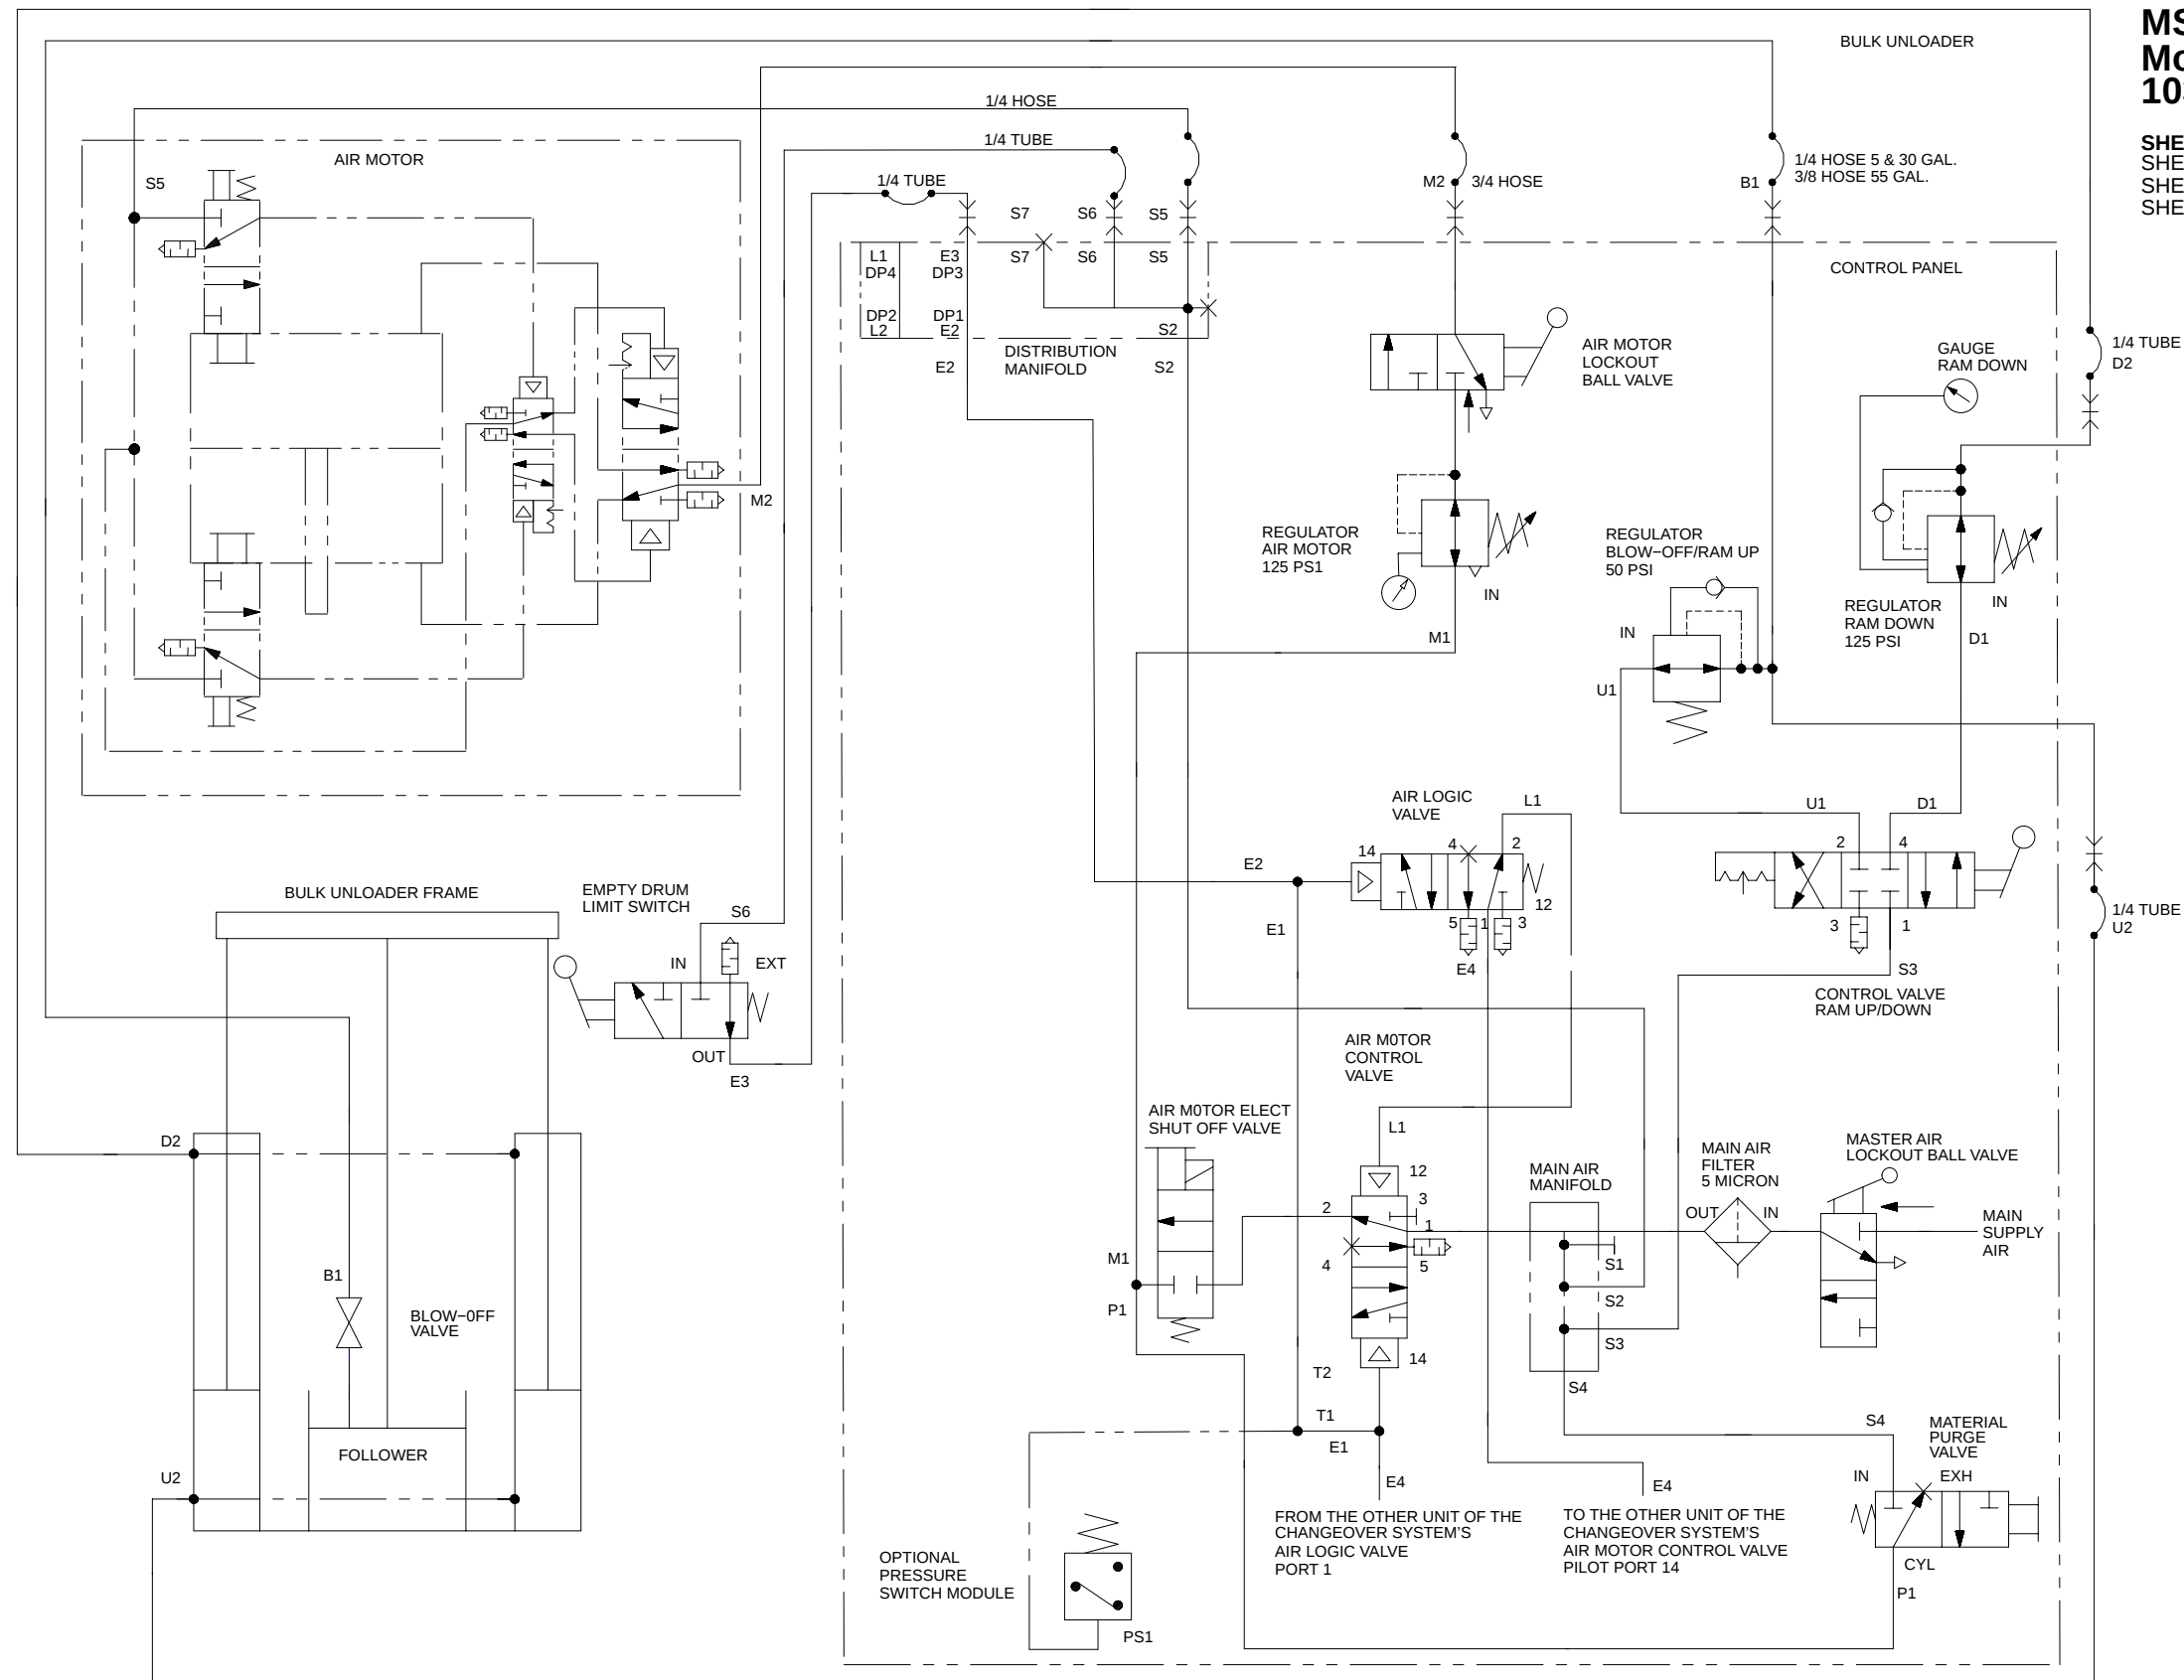


Schematic 1038935B01 (Sheet 1 of 4)

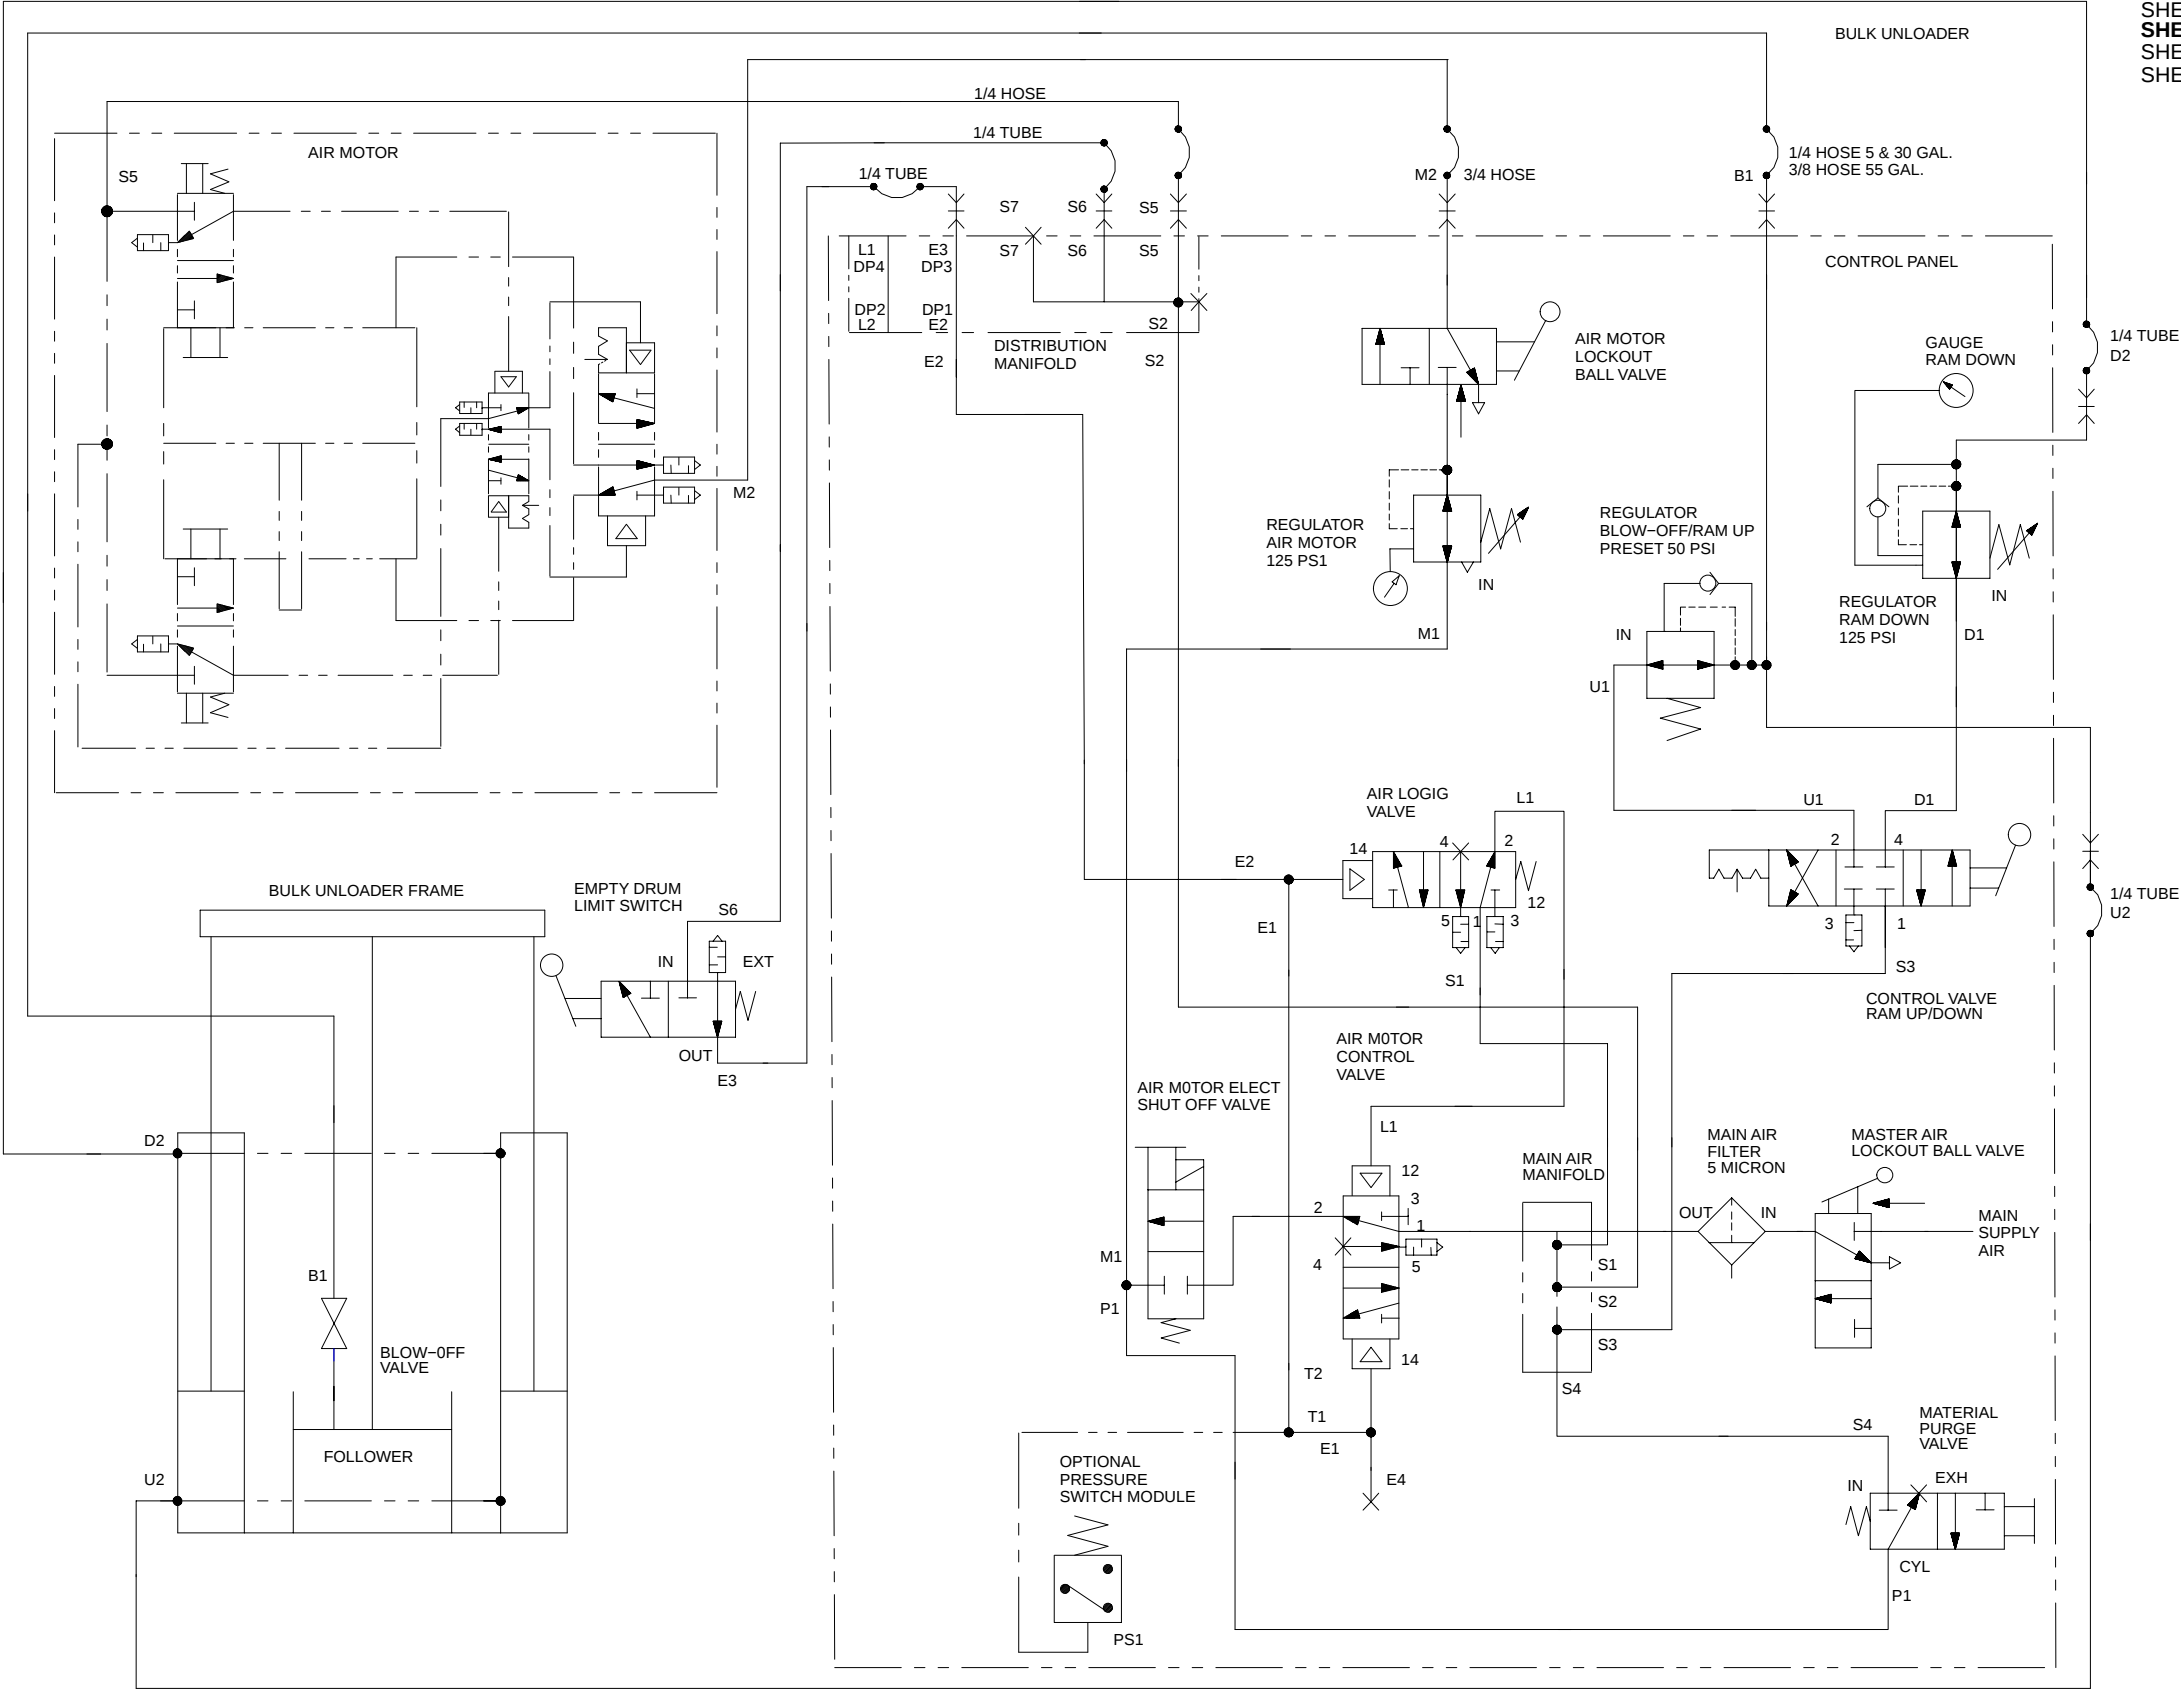


SHEET 1: CHANGEOVER WITH EMPTY DRUM LEVEL
SHEET 2: **STANDALONE WITH EMPTY DRUM LEVEL**
SHEET 3: CHANGEOVER PUMP TIMER DELAY MODULE WITH EMPTY DRUM LEVEL
SHEET 4: LOW AND EMPTY DRUM LEVEL DETECTION OPTION

Schematic 1038935B01 (Sheet 2 of 4)

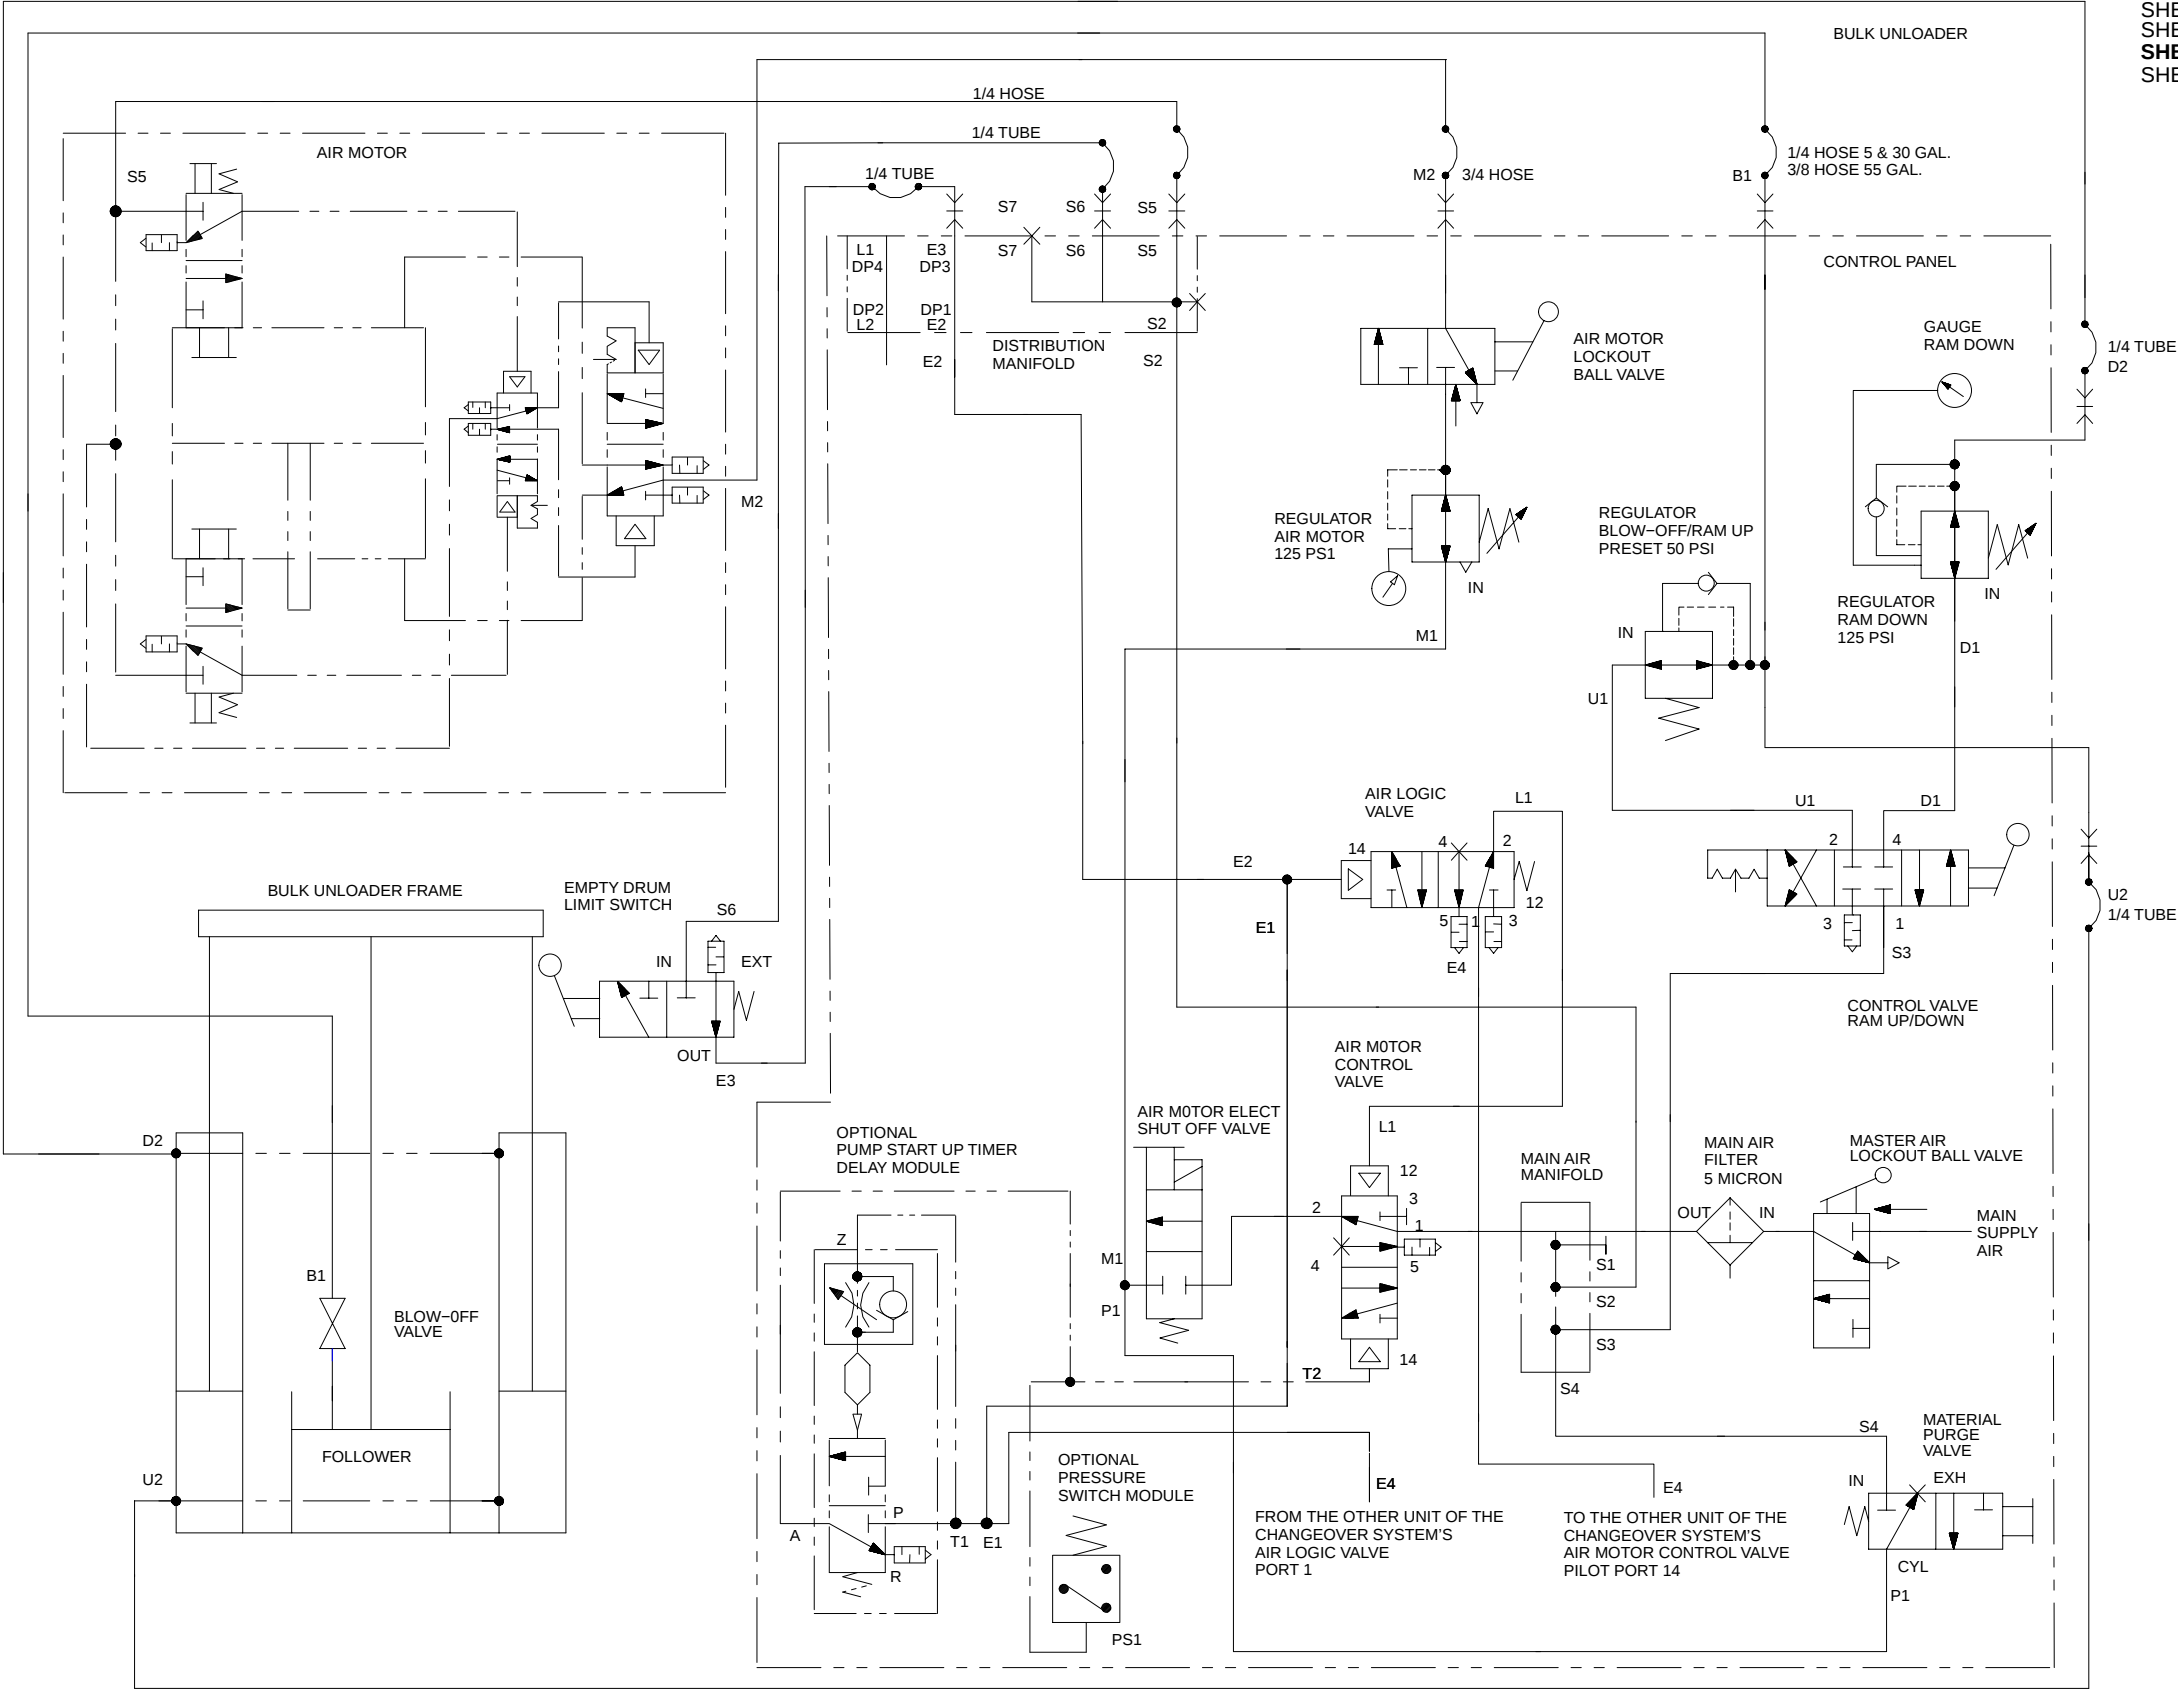

SHEET 1: CHANGEOVER WITH EMPTY DRUM LEVEL
SHEET 2: STANDALONE WITH EMPTY DRUM LEVEL
SHEET 3: CHANGEOVER PUMP TIMER DELAY MODULE WITH EMPTY DRUM LEVEL
SHEET 4: LOW AND EMPTY DRUM LEVEL DETECTION OPTION

Schematic 1038935B01 (Sheet 3 of 4)

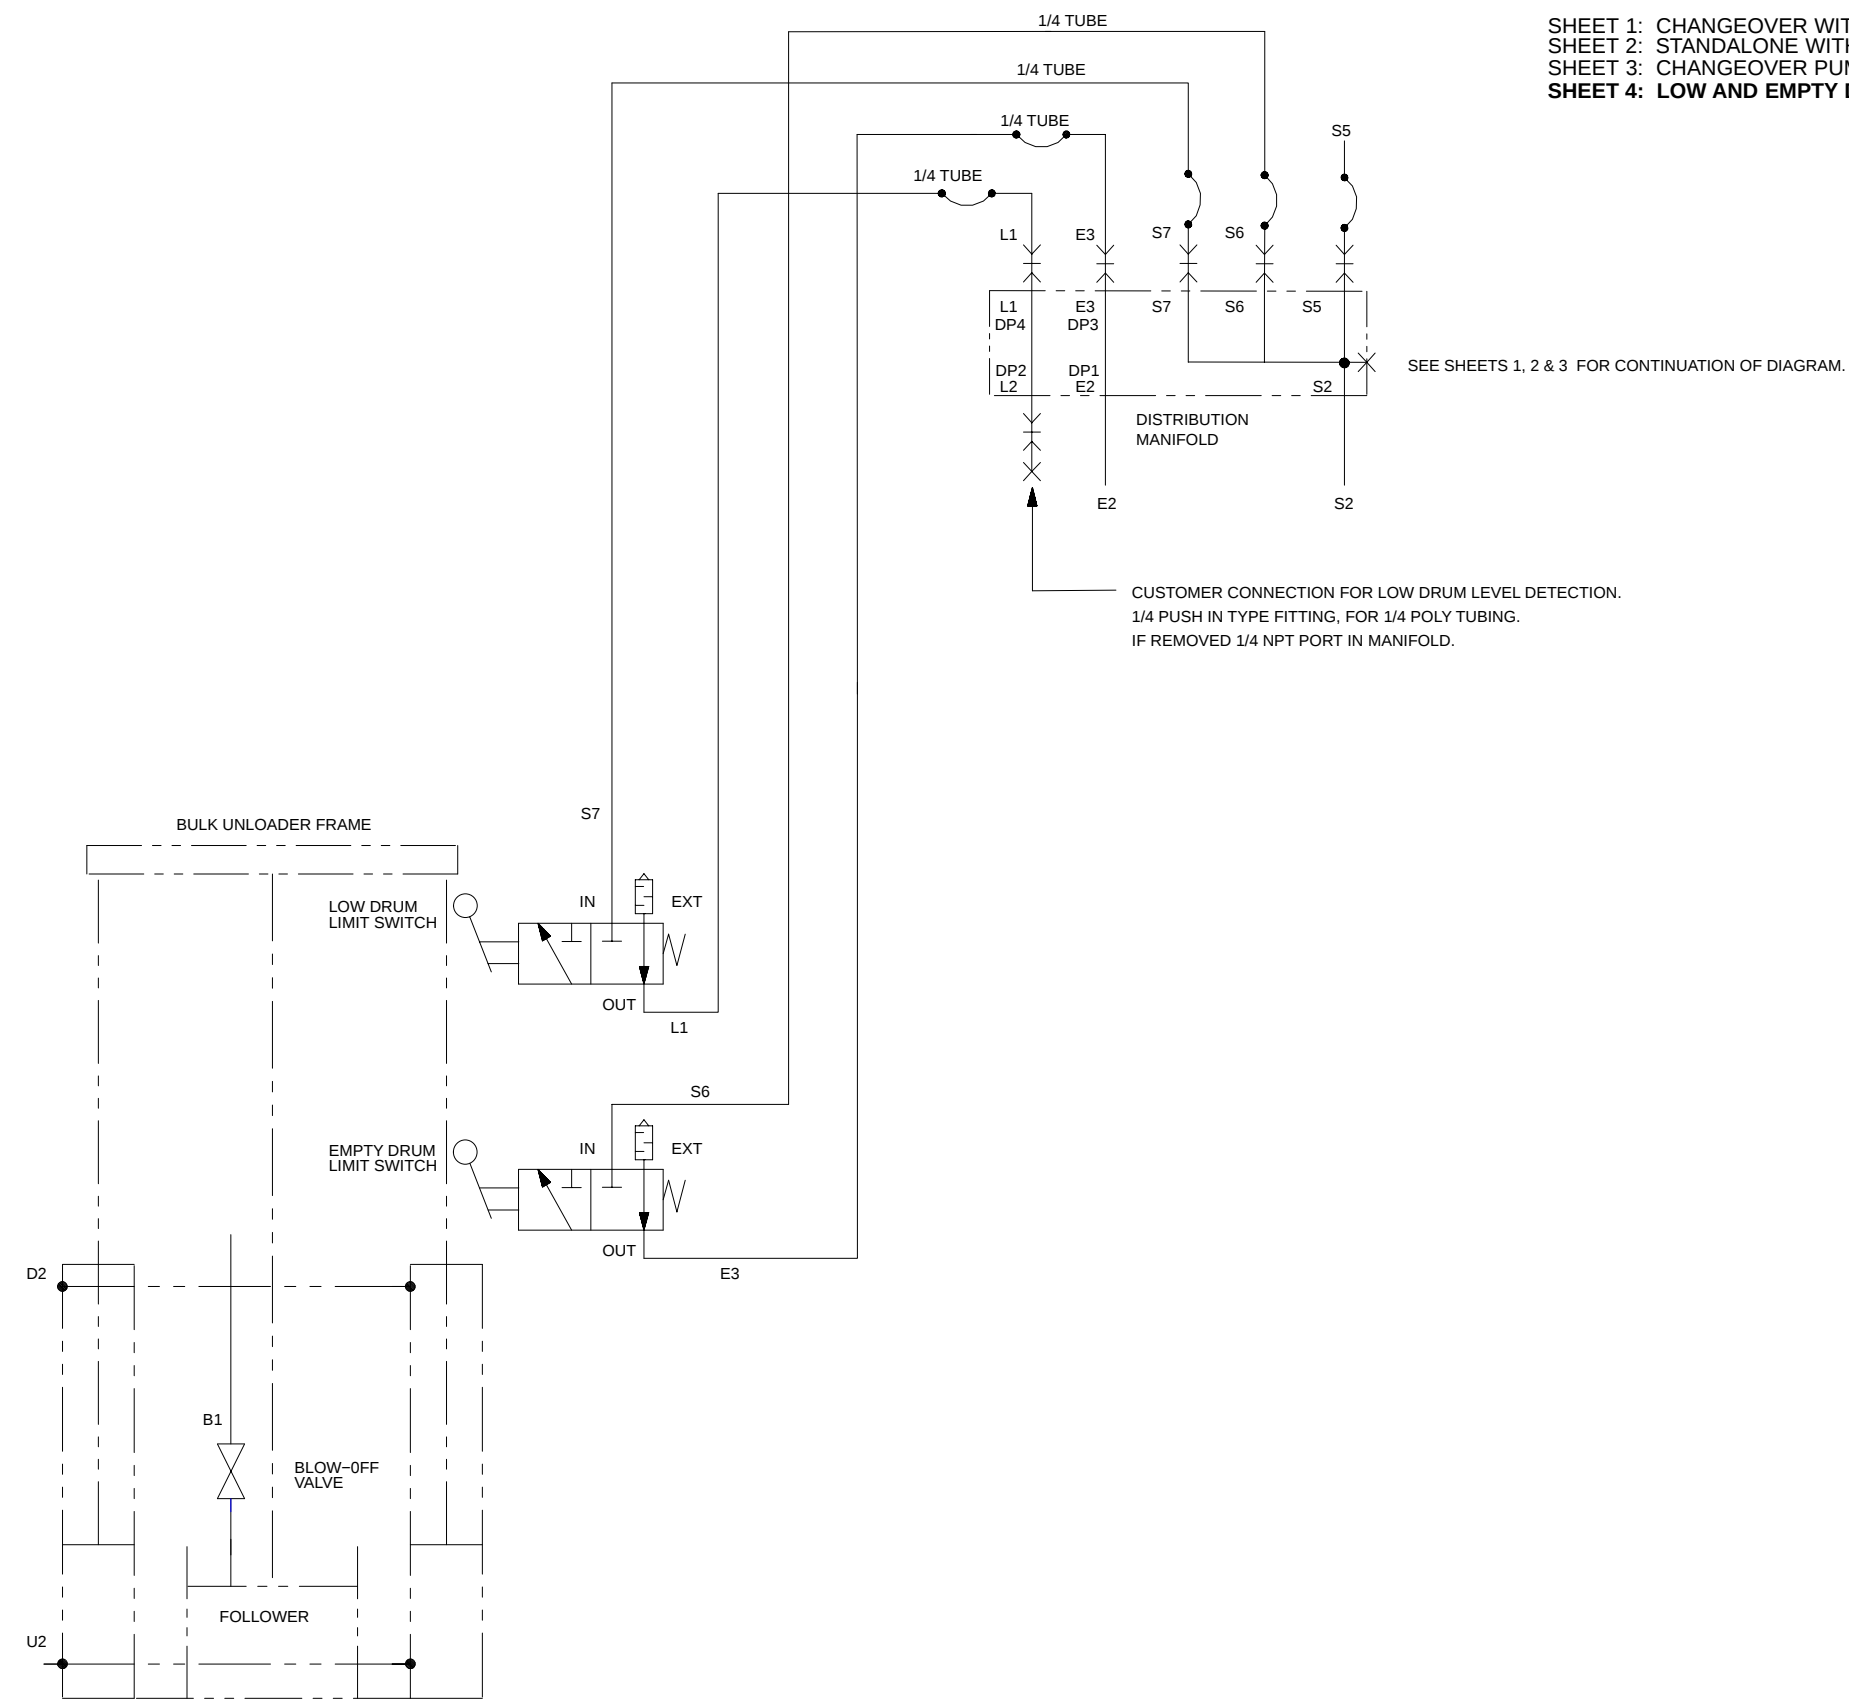


SHEET 1: CHANGEOVER WITH EMPTY DRUM LEVEL
SHEET 2: STANDALONE WITH EMPTY DRUM LEVEL
SHEET 3: CHANGEOVER PUMP TIMER DELAY MODULE WITH EMPTY DRUM LEVEL
SHEET 4: LOW AND EMPTY DRUM LEVEL DETECTION OPTION


Schematic 1038935B01 (Sheet 4 of 4)

Manual Operation Without Electric Pump Shutoff Control Module 1058169A01 (4 Sheets)

SHEET 1: CHANGEOVER WITH EMPTY DRUM LEVEL
SHEET 2: STANDALONE WITH EMPTY DRUM LEVEL
SHEET 3: CHANGEOVER PUMP TIMER DELAY MODULE WITH EMPTY DRUM LEVEL
SHEET 4: LOW AND EMPTY DRUM LEVEL DETECTION OPTION

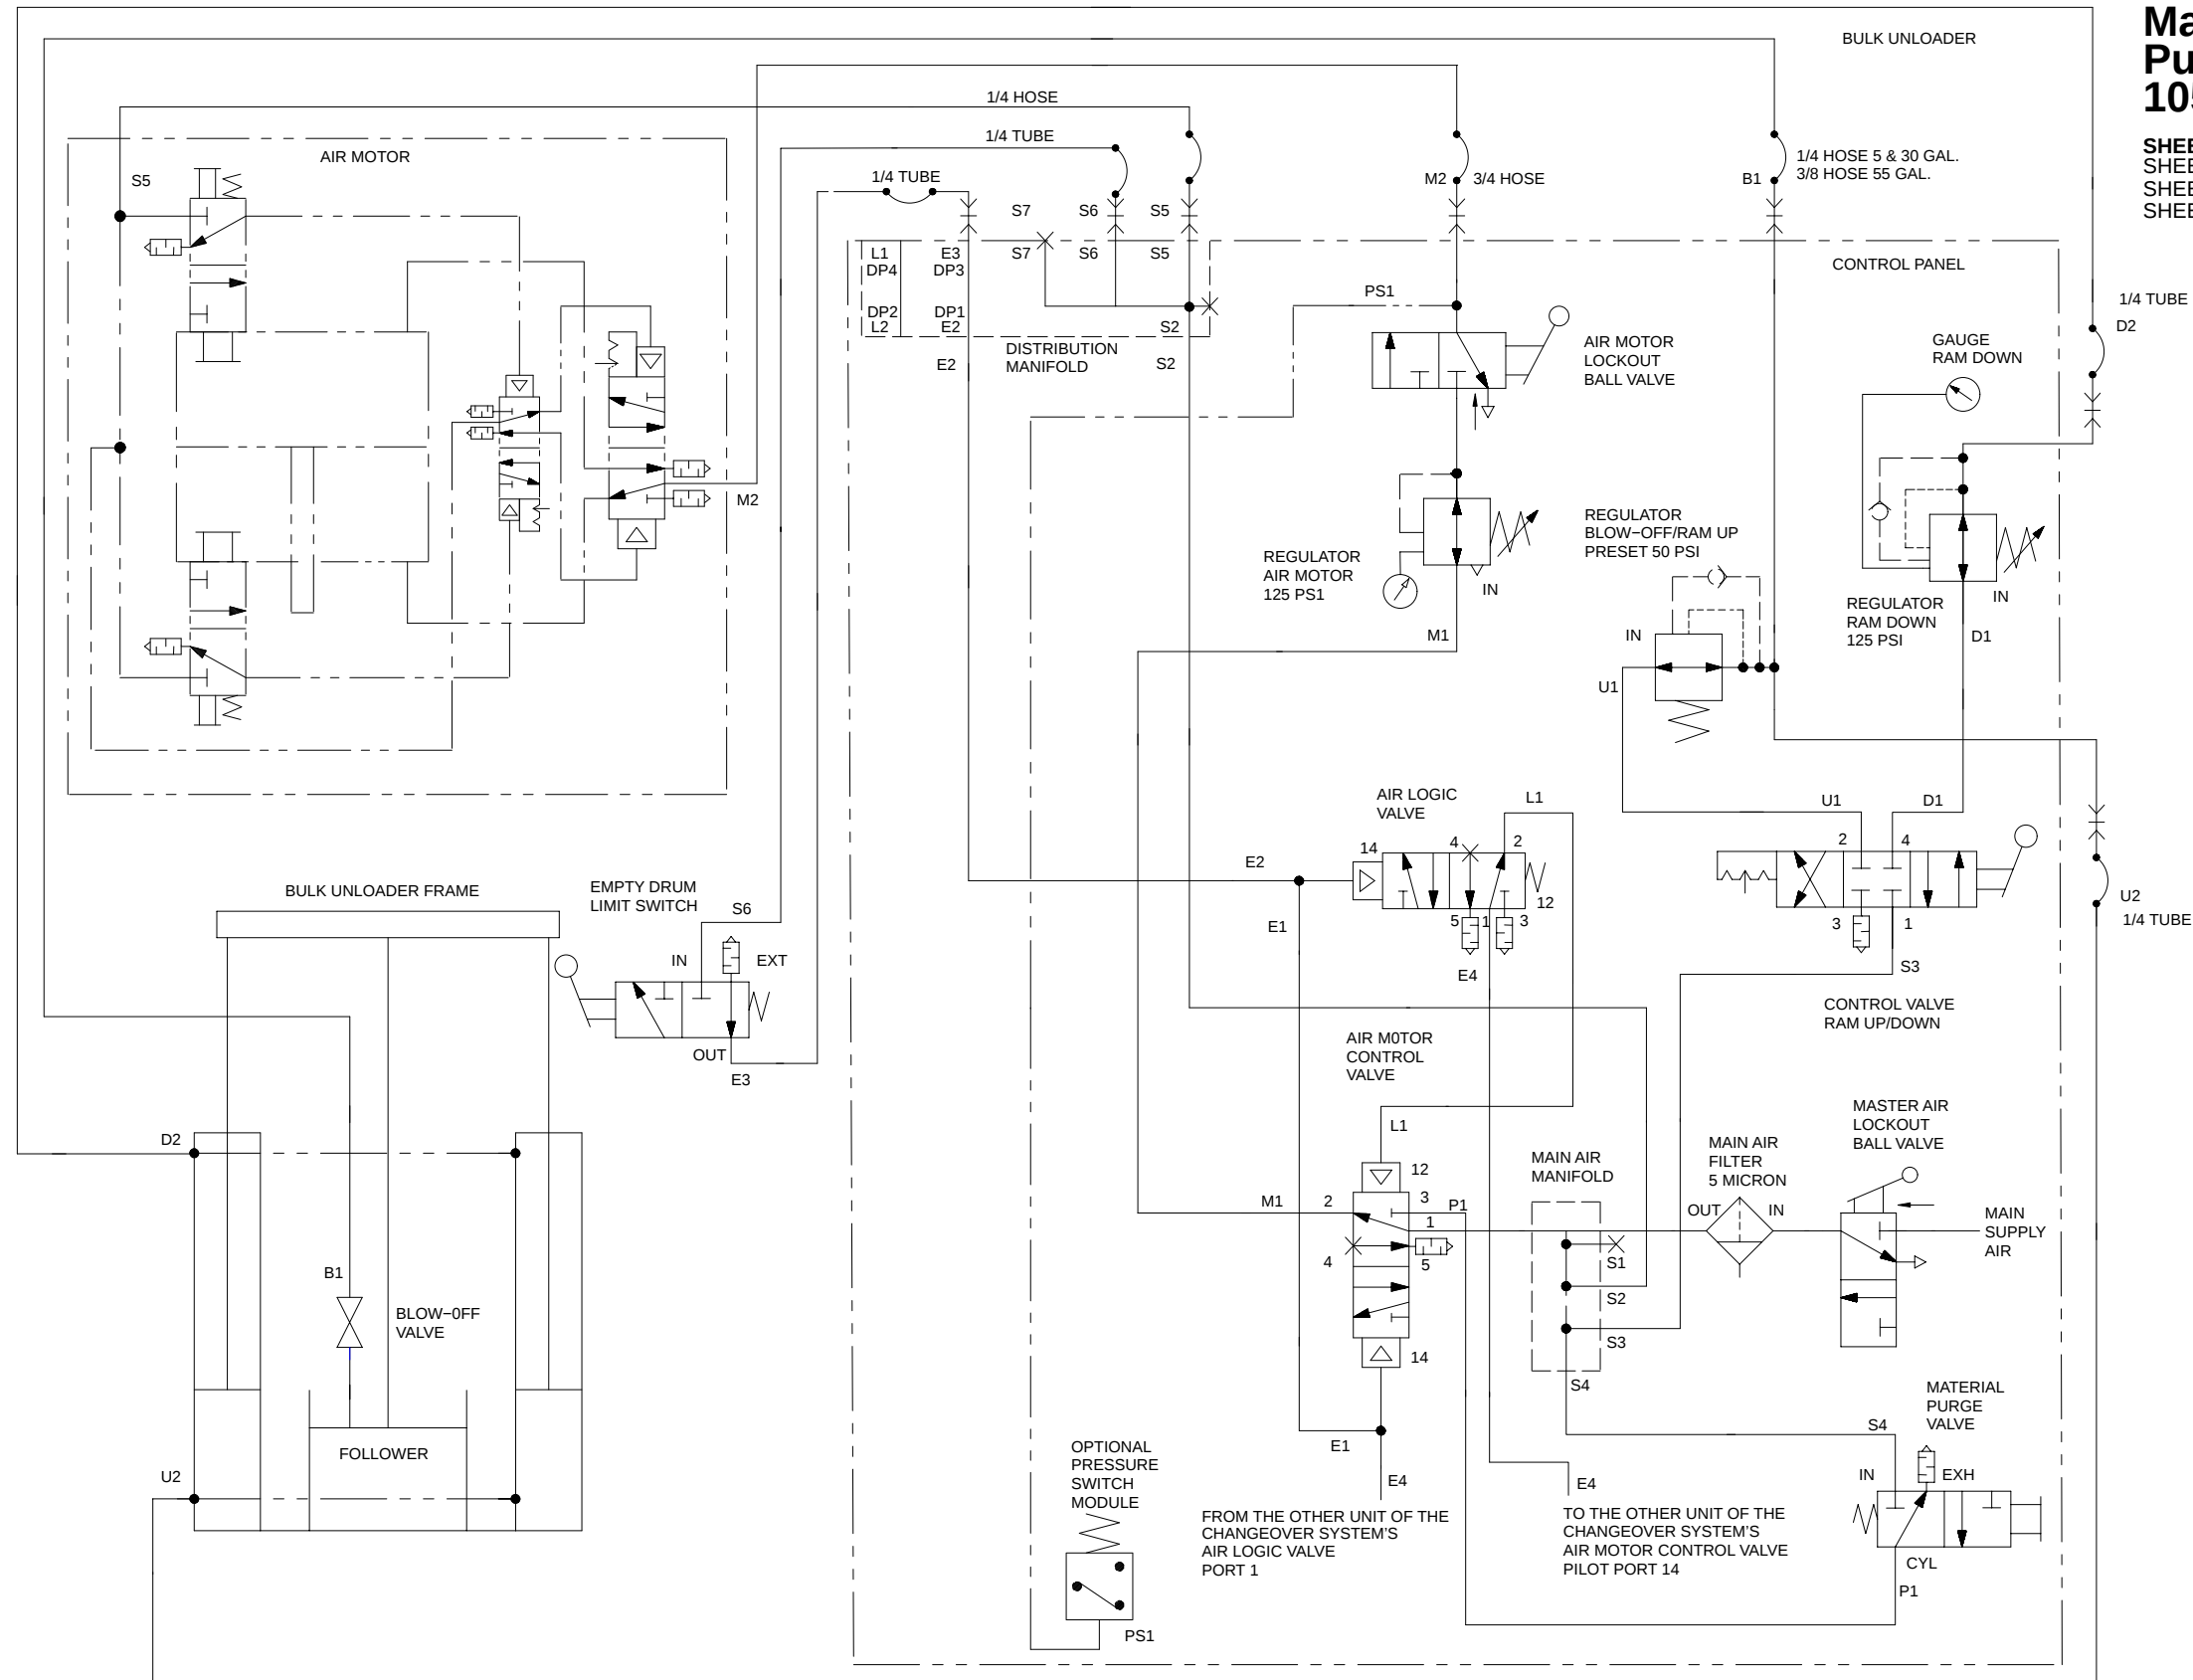


Schematic 1058169A01 (Sheet 1 of 4)

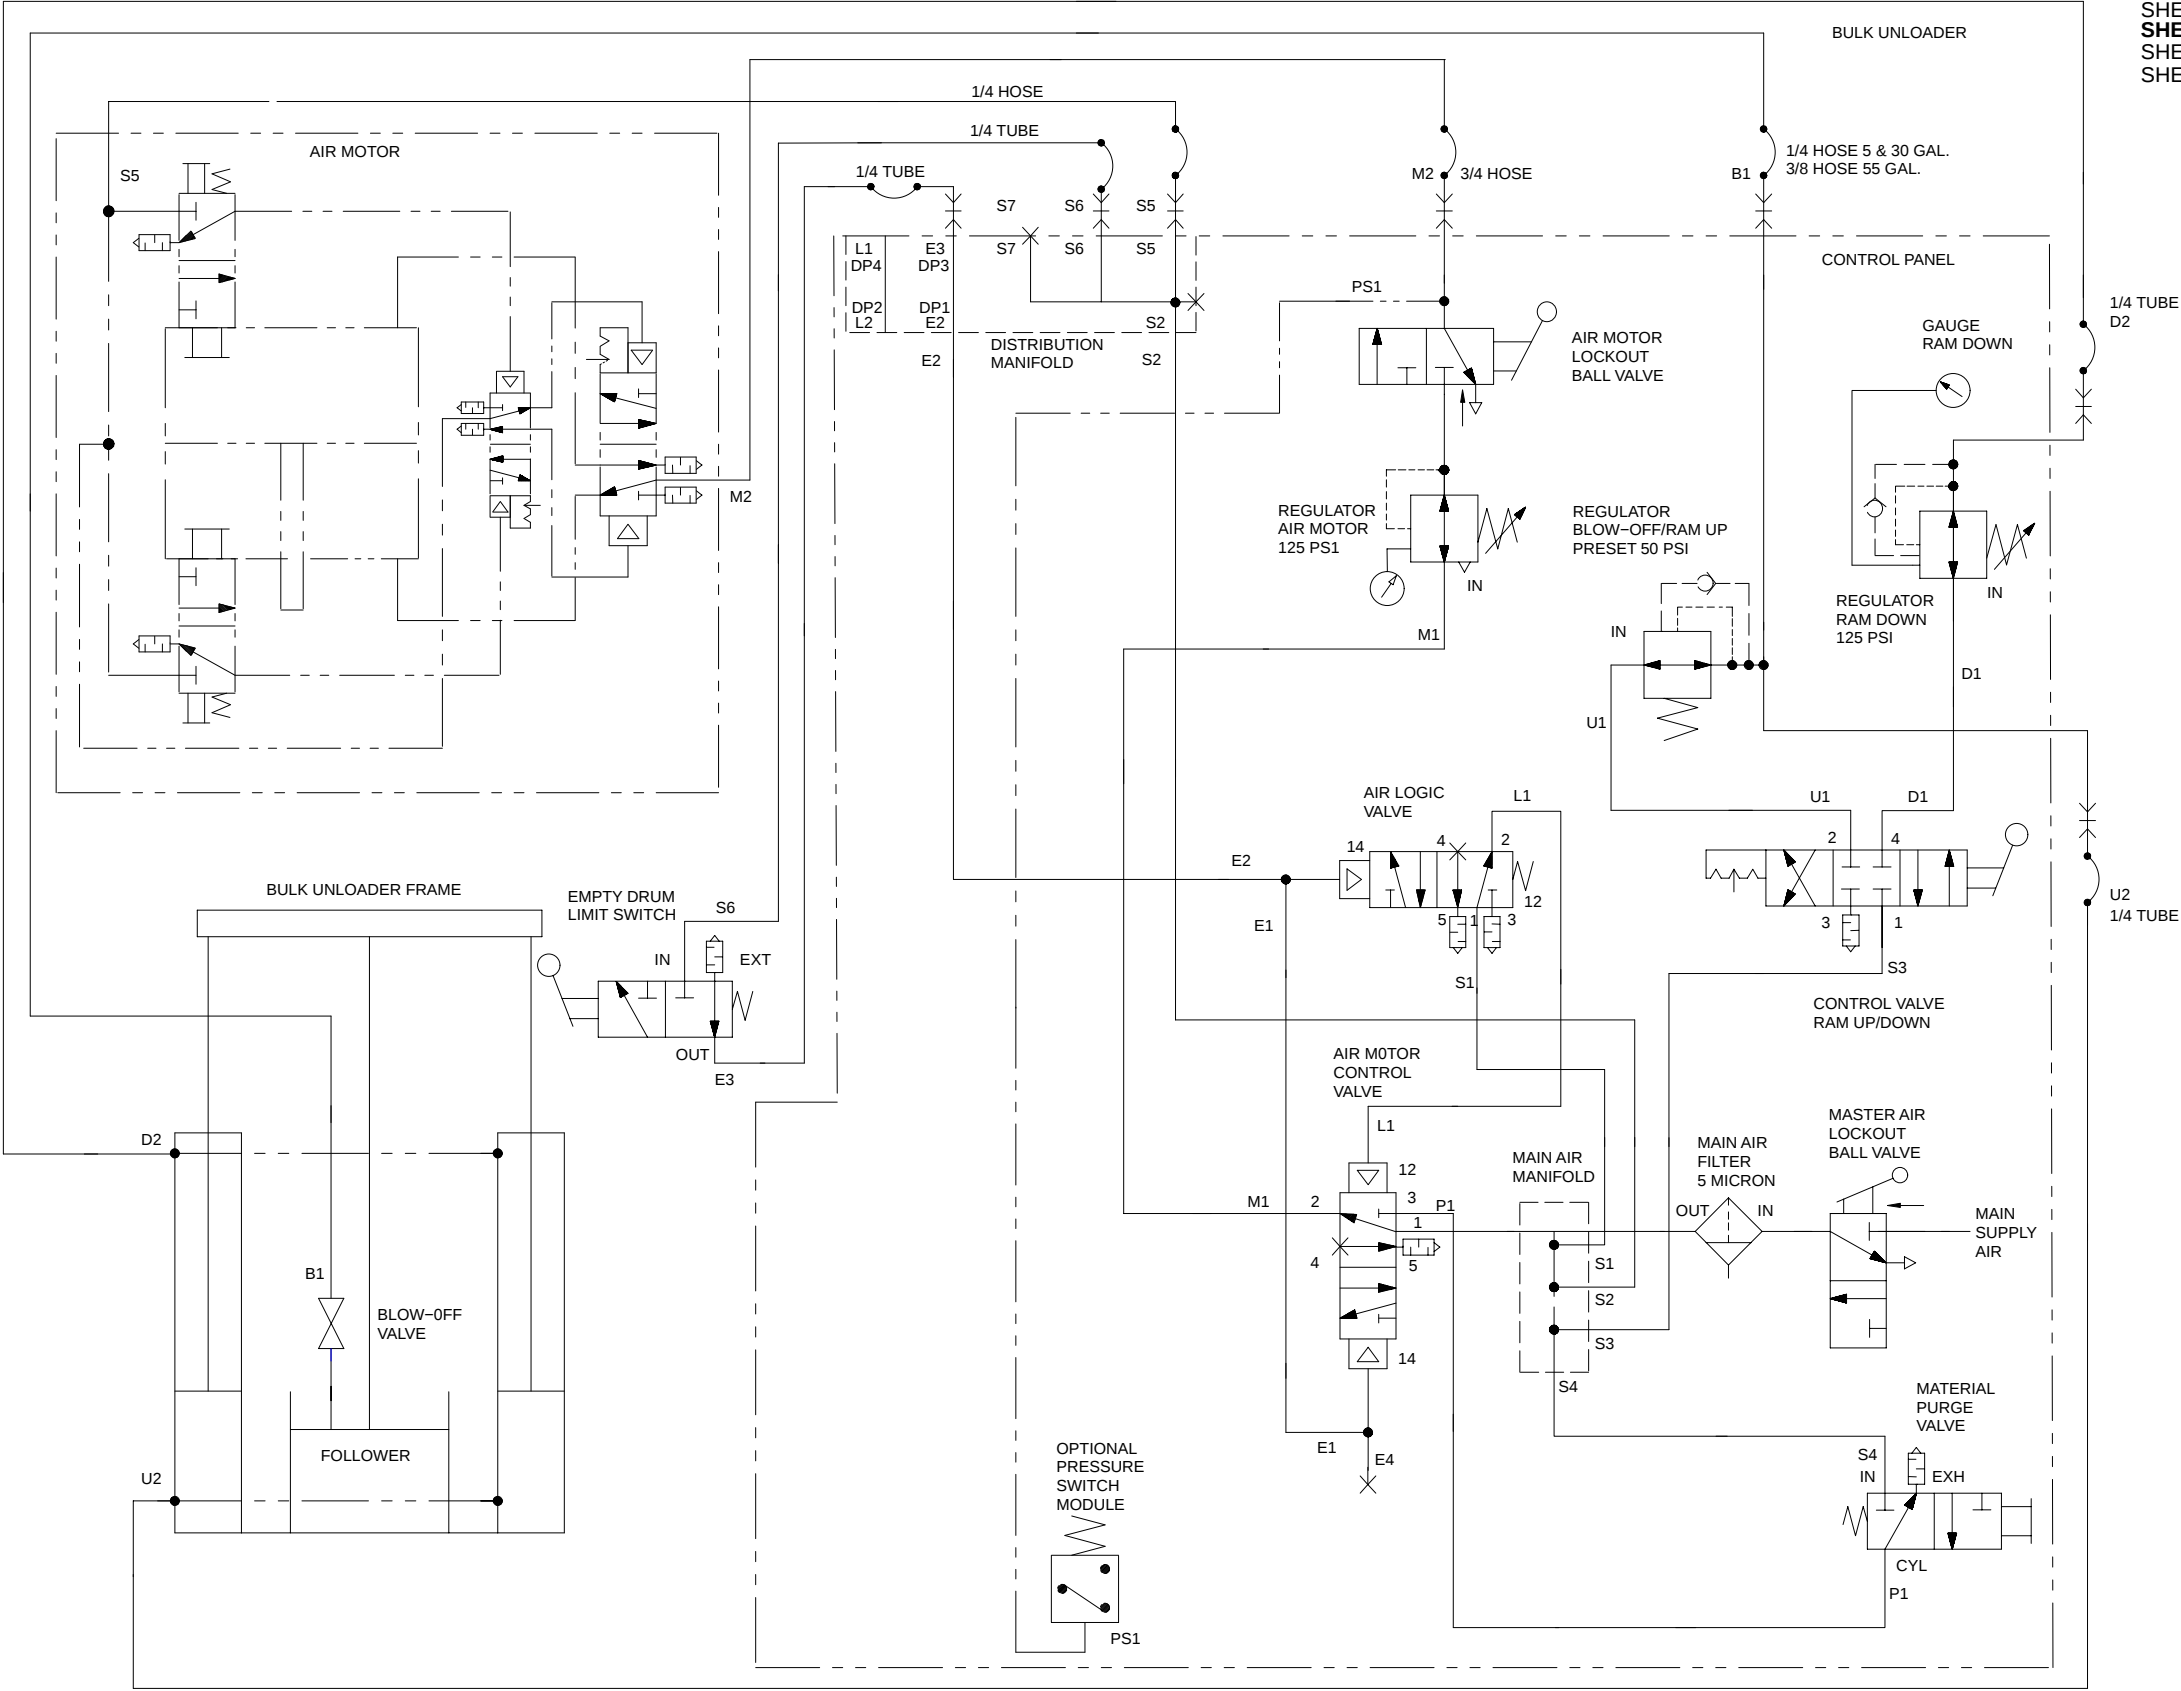

SHEET 1: CHANGEOVER WITH EMPTY DRUM LEVEL
SHEET 2: STANDALONE WITH EMPTY DRUM LEVEL
SHEET 3: CHANGEOVER PUMP TIMER DELAY MODULE WITH EMPTY DRUM LEVEL
SHEET 4: LOW AND EMPTY DRUM LEVEL DETECTION OPTION


Schematic 1058169A01 (Sheet 2 of 4)

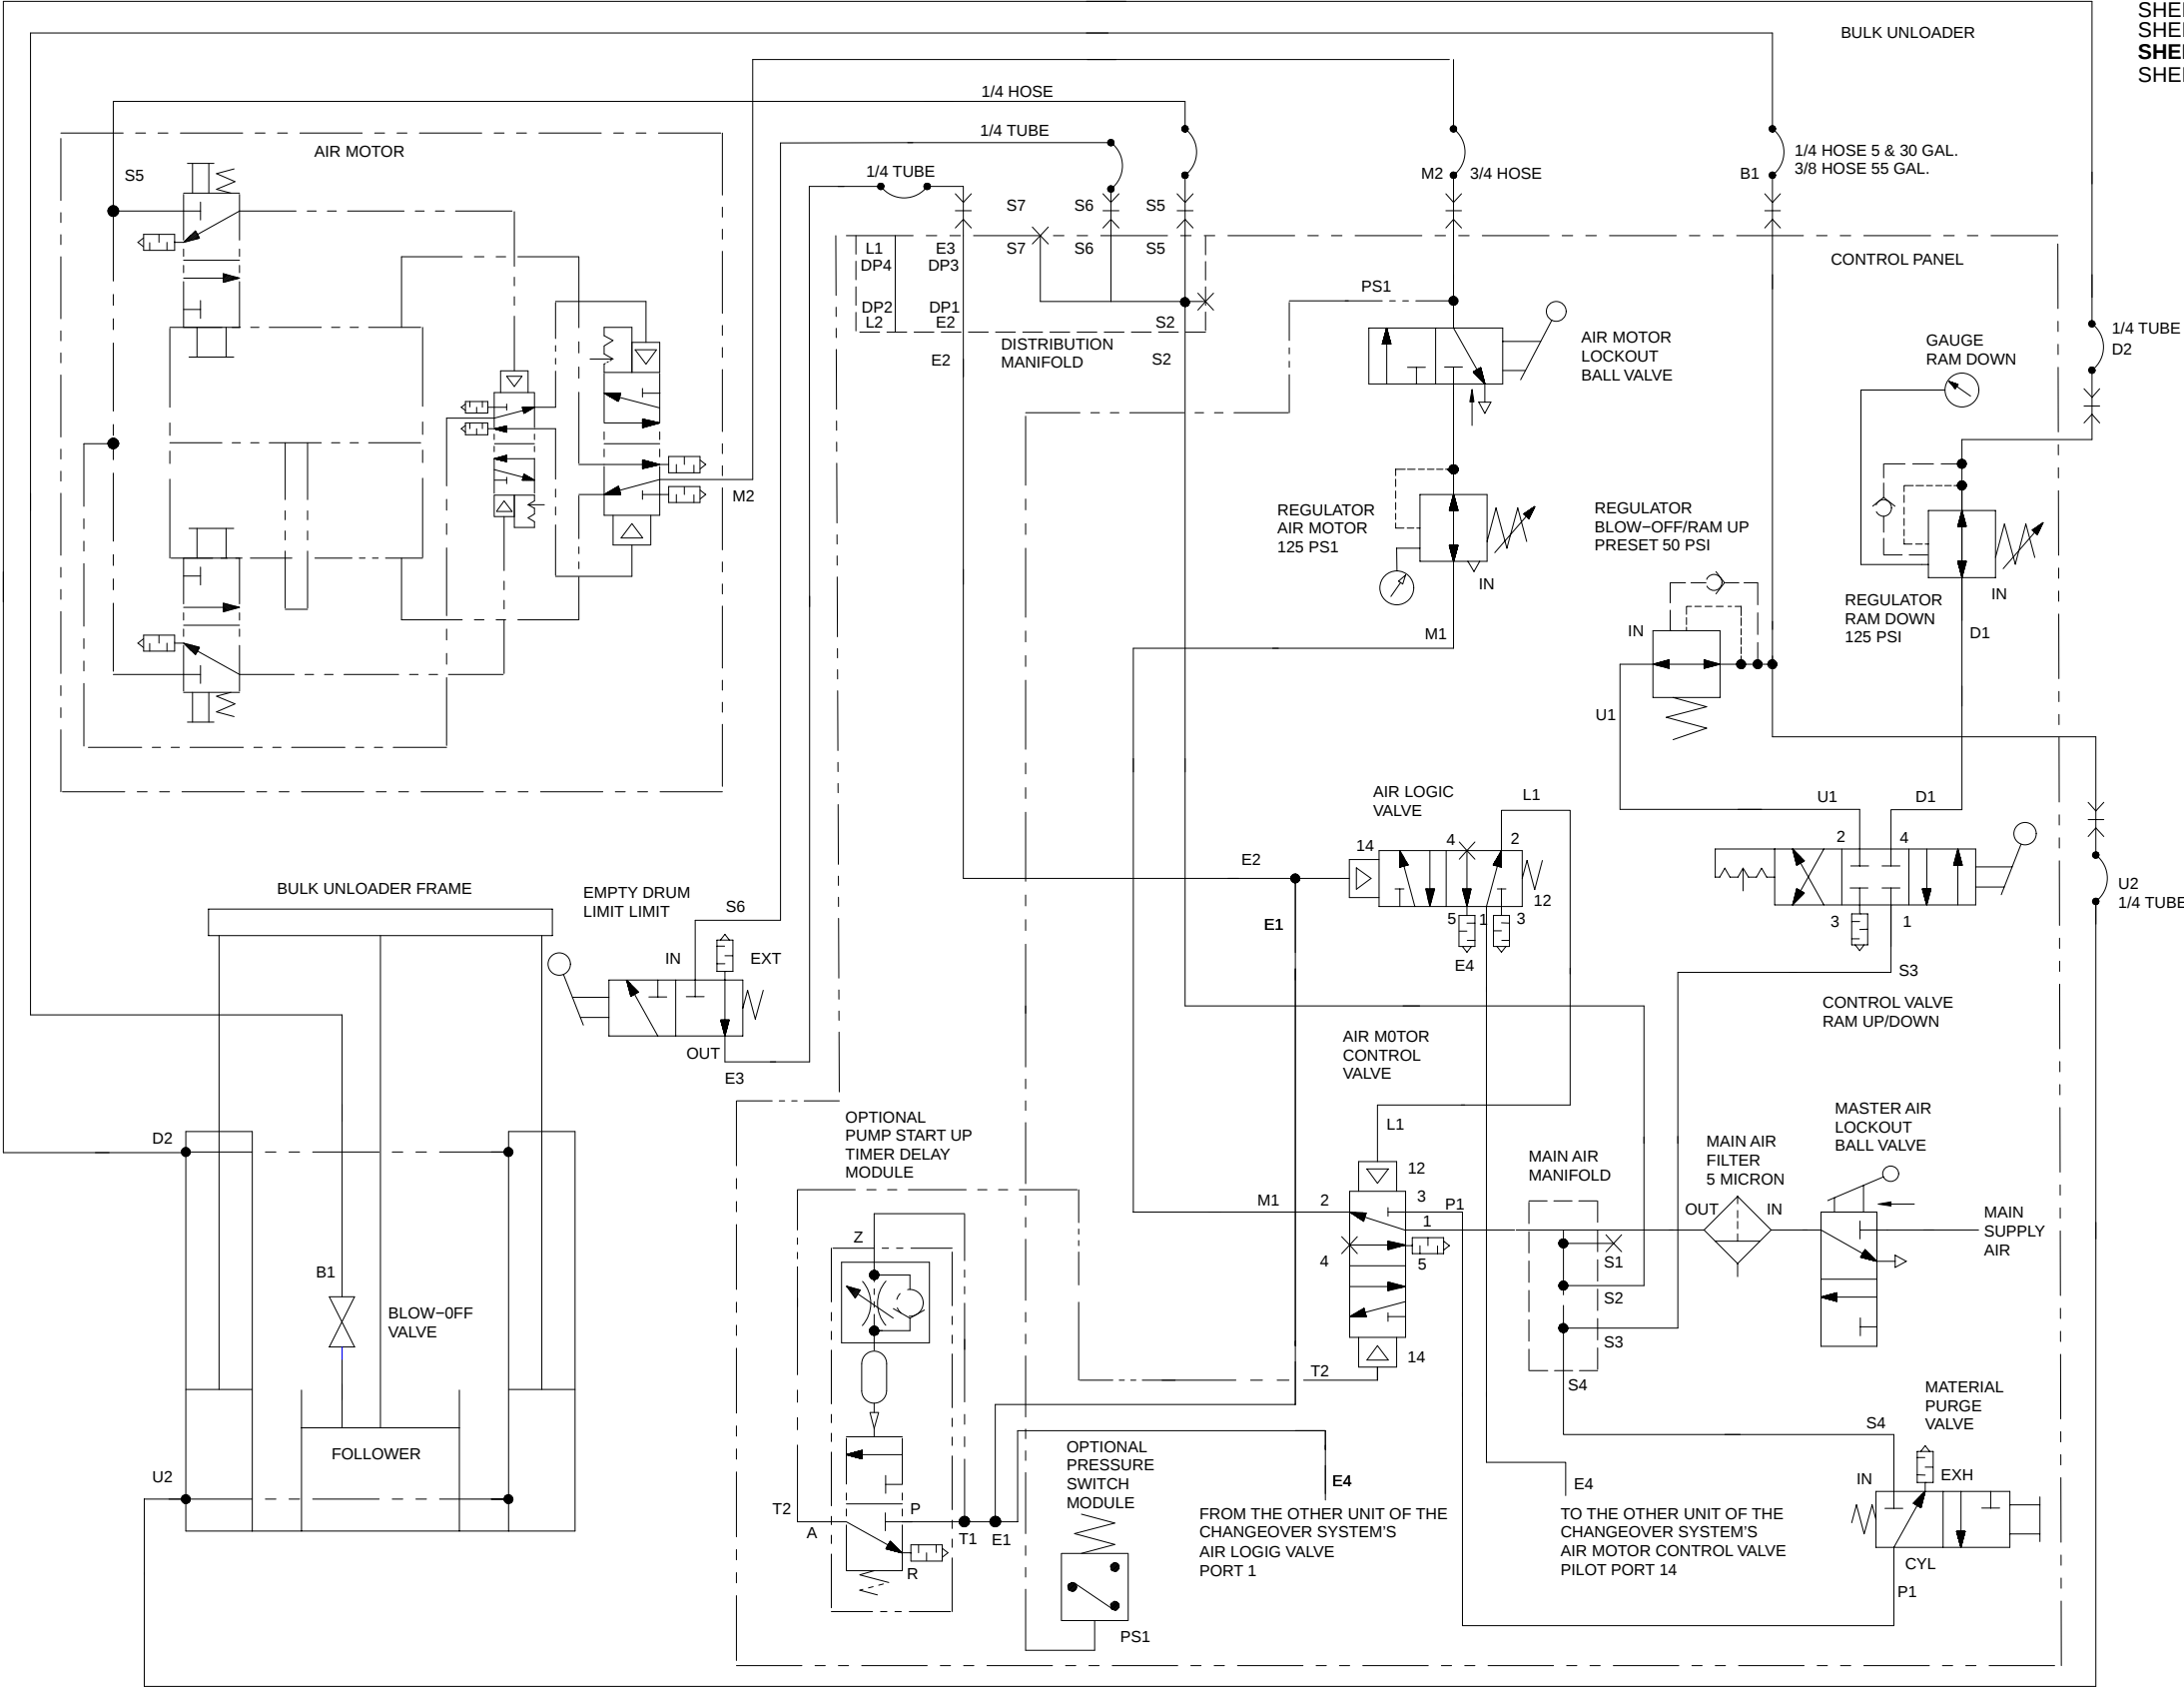

SHEET 1: CHANGEOVER WITH EMPTY DRUM LEVEL
SHEET 2: STANDALONE WITH EMPTY DRUM LEVEL
SHEET 3: CHANGEOVER PUMP TIMER DELAY MODULE WITH EMPTY DRUM LEVEL
SHEET 4: LOW AND EMPTY DRUM LEVEL DETECTION OPTION

Schematic 1058169A01 (Sheet 3 of 4)

SHEET 1: CHANGEOVER WITH EMPTY DRUM LEVEL
SHEET 2: STANDALONE WITH EMPTY DRUM LEVEL
SHEET 3: CHANGEOVER PUMP TIMER DELAY MODULE WITH EMPTY DRUM LEVEL
SHEET 4: LOW AND EMPTY DRUM LEVEL DETECTION OPTION

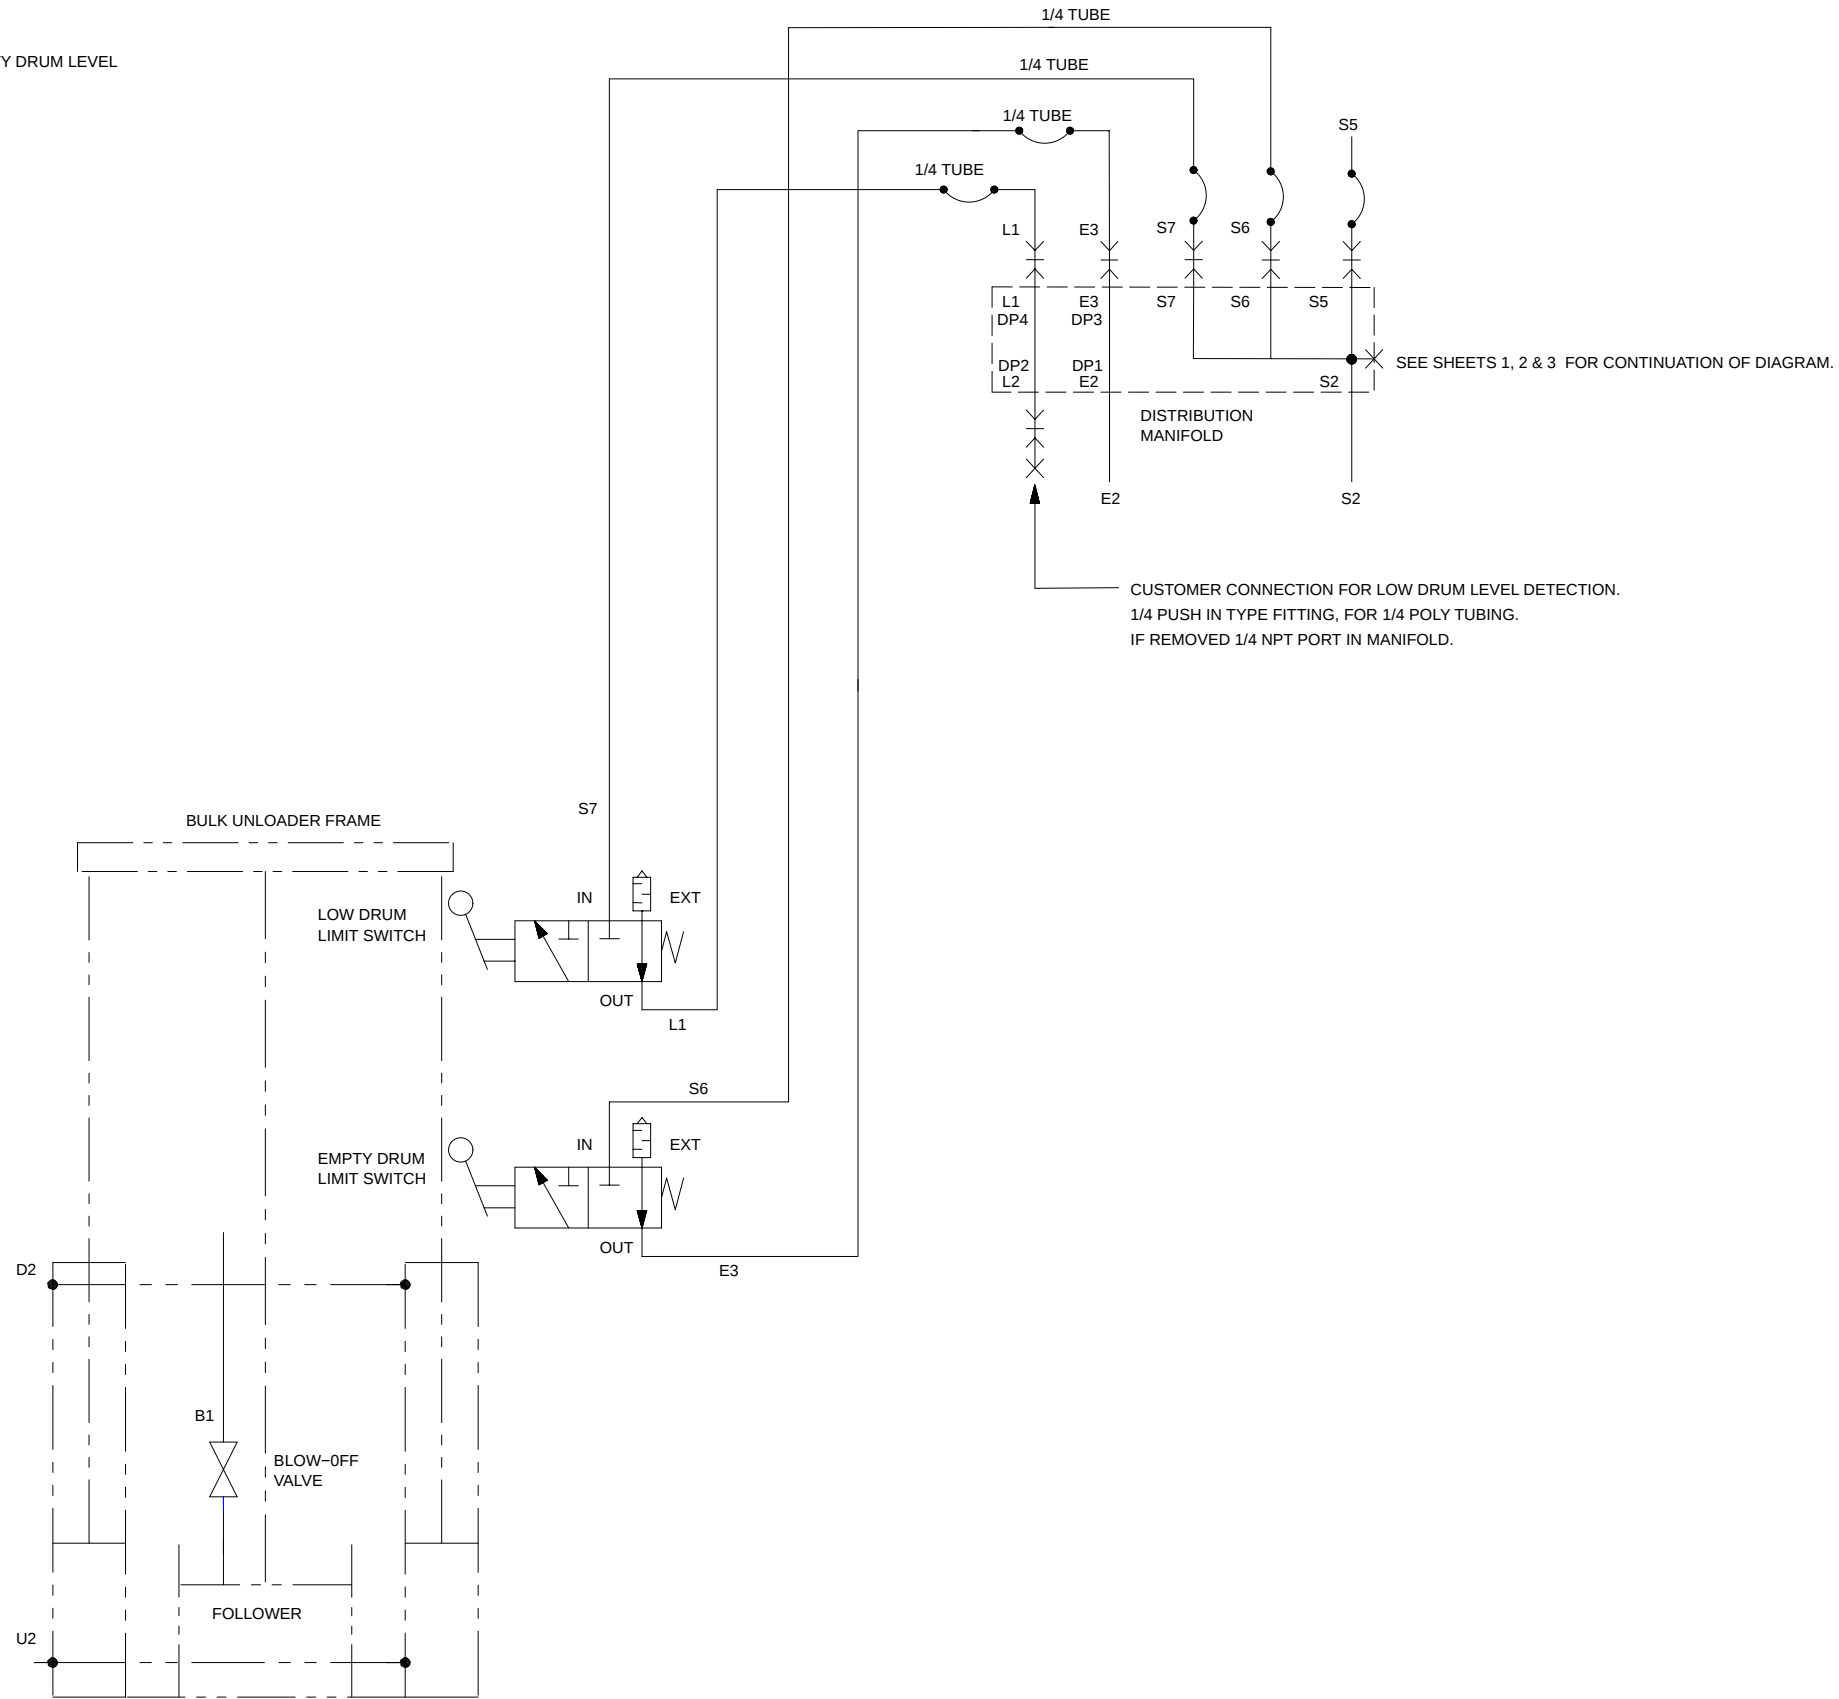

Schematic 1058169A01 (Sheet 4 of 4)

Issued 7/06

Original copyright date 2006. Nordson, the Nordson logo, and Rhino are registered trademarks of Nordson Corporation. All other trademarks are the property of their respective owner.