


Kinetix® Airless Automatic Electrostatic Spray Gun

Service Kits and Parts


Keep the following parts in inventory to avoid unplanned downtime.

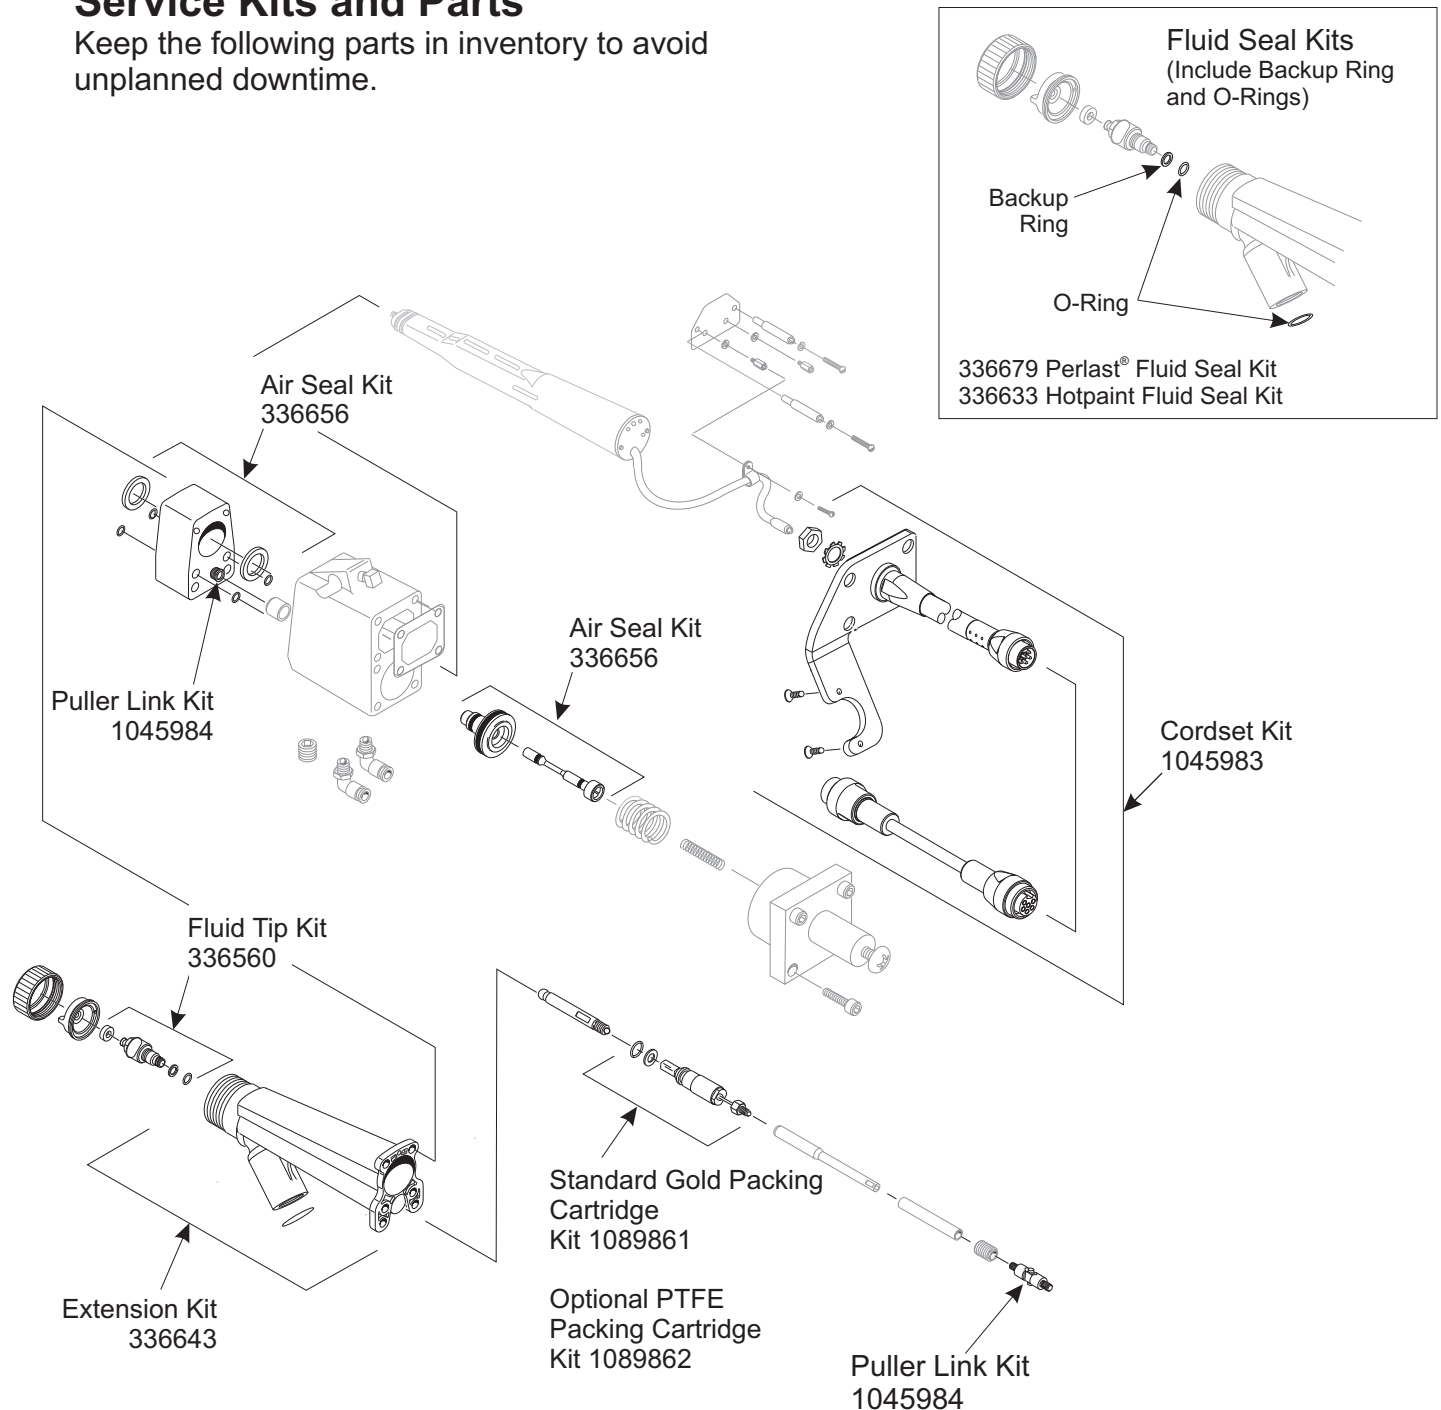

Refer to the *Kinetix Airspray Fluid Tip and Air Cap Selection Chart* and the *Kinetix KVLP Fluid Tip and Air Cap Selection Chart* included with this manual for part numbers and descriptions.

Kinetix, Nordson, and the Nordson logo are registered trademarks of Nordson Corporation.
MagnaLube is a registered trademark of General Magnaplate Corporation.
Perlast is a registered trademark of Precision Polymer Engineering Limited Company.

Service Notes

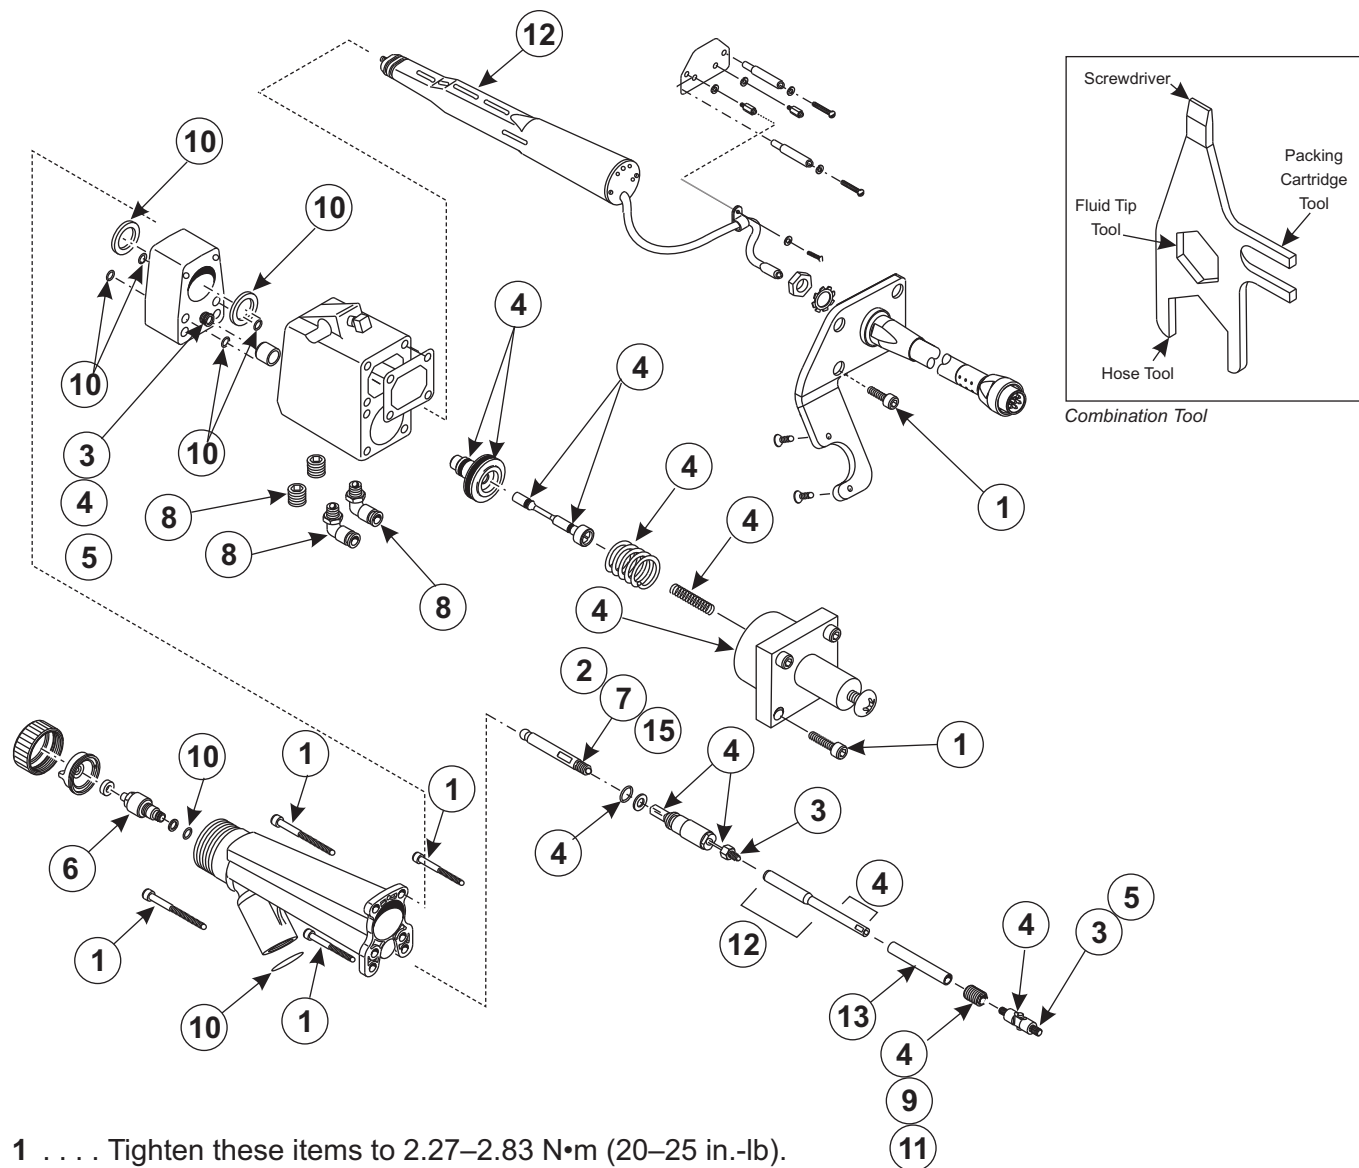

- 1 . . . Tighten these items to 2.27–2.83 N•m (20–25 in.-lb).
- 2 . . . Tighten the item finger tight.
- 3 . . . Apply threadlocking adhesive to the threads of these items.
- 4 . . . Generously apply MagnaLube® G (PTFE-filled lubricant) to these parts.
- 5 . . . Make sure the pins on puller link engage in the grooves in the retainer bushing.
- 6 . . . Tighten these items to 0.9–1.13 N•m (8–10 in.-lb).
- 7 . . . Activate the spray gun to pull the ball tip back before removing or installing a fluid tip.
- 8 . . . Apply pipe sealant adhesive if fittings do not already have manufacturer's thread sealant applied.
- 9 . . . Tighten the item finger tight.
- 10 . . . Apply a dielectric grease to these O-rings.
- 11 . . . Apply a thin coat of dielectric grease to the threads of this item.
- 12 . . . Apply a liberal coat of dielectric grease to these areas.
- 13 . . . Apply a thin coat of dielectric grease to the outside of this item.
- 14 . . . Insert hose end into the extension until the O-ring is seated. Screw in the retaining nut then tighten 1/4 turn past hand tight.
- 15 . . . A removable threadlocking adhesive can be applied to the threads of the ball tip if there are problems with the ball tip backing out.