




















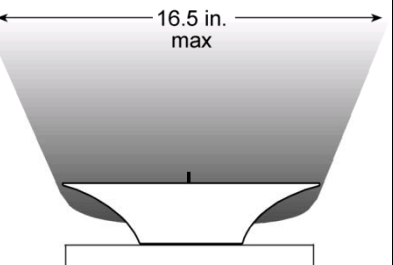
Conical Nozzle Selection Chart for Sure Coat® Manual Powder Spray Guns



For a wide spray pattern, slide the pattern adjuster back.



For a narrow spray pattern, slide the pattern adjuster forward.

Deflector	Pattern Adjuster	Spray Pattern	Powder Velocity	Application
14-mm 135865  	19 mm 309444 		High	Long Gun-to-Part Distance
16 mm 147880  	19 mm 309444 		Medium-High	General Finishing
19 mm 173138  	19 mm 309444 		Medium	Large Surfaces
26 mm 173141  	26 mm 309450 With Nozzle Base 309448 		Medium-Low	Parts with Gaps and Recesses
38 mm 249233  	38 mm 309446 		Low	Large Surfaces

**Nordson Corporation
Powder Customer Service**

300 Nordson Drive • Amherst, OH 44001 • (800) 433-9319
 Email: finishing_csc@nordson.com
 www.nordson.com

Nordson Canada, Limited



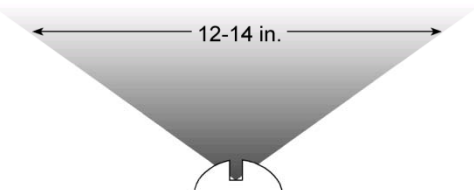


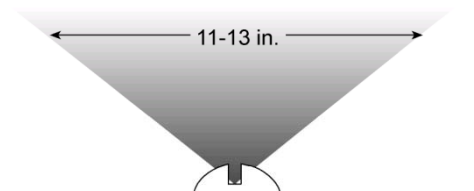


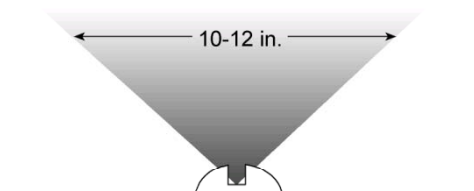


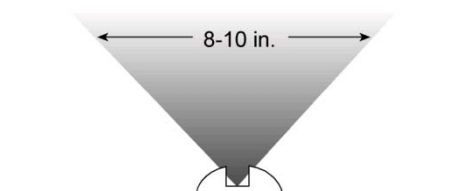


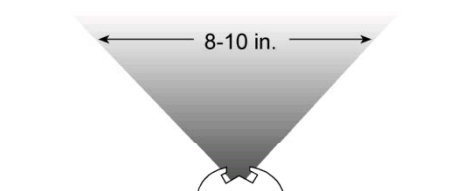


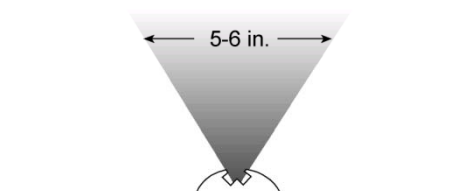


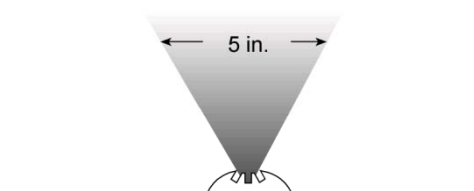
1211 Denison Street • Markham, Ontario L3R 4B3
 (800) 463-3200
 www.nordson.ca

Nordson Deutschland GmbH

Heinrich-Hertz-Strasse 42 • 40699 Erkrath, Germany
 Phone: 49-211-9205-0
 Email: powder.systems@de.nordson.com
 www.nordson-finishing-eu.com

Flat Spray Nozzle Selection Chart for Sure Coat® Manual Powder Spray Guns



Nozzle	Spray Pattern	Powder Velocity	Application
2.5 mm Flat Spray 302101  		High	Large, Flat Surfaces
3 mm Flat Spray 302102  		Medium-High	Fine Finish on Flat Surfaces
4 mm Flat Spray 302103  		Medium-Low	Touch Up
6 mm Flat Spray 302104  		Low	Reinforcement
60-Degree Cross-Cut 302105  		Medium-Low	Recess Reinforcement
90-Degree Cross-Cut 302106  		Low	Deep Recesses
Castle 302107  		Medium-Low	Pin Point

Nordson Corporation
Powder Customer Service
 300 Nordson Drive • Amherst, OH 44001 • (800) 433-9319
 Email: finishing_csc@nordson.com
 www.nordson.com

Nordson Canada, Limited
 1211 Denison Street • Markham, Ontario L3R 4B3
 (800) 463-3200
 www.nordson.ca

Nordson Deutschland GmbH
 Heinrich-Hertz-Strasse 42 • 40699 Erkrath, Germany
 Phone: 49-211-9205-0
 Email: powder.systems@de.nordson.com
 www.nordson-finishing-eu.com